
24+2G SNMP

Switch

User's Manual

Ver 1.2

24+2 SNMP Switch User Menu

1. Introduction.....	5
1.1 Unpacking.....	6
1.2 Installation.....	6
1.3 Initial set up for management.....	8
1.3.1 Out-of-Band Terminal Mode Configuration.....	8
1.3.2 In-band management through ethernet.....	9
1.3.3 Telnet management.....	11
2. Web Management Function.....	12
2-1. Web Management Home Overview.....	12
2-4. Administrator.....	12
2-5. TFTP Update Firmware.....	12
2-8. Reboot.....	12
2-2. Port status.....	12
2-3. Port Statistics.....	15
2-4. Administrator.....	16
2-4-1. IP Address/Subnet Mask/Gateway.....	16
2-4-2 Switch Setting.....	17
2-4-2-1 Basic.....	17
2-4-2-2 Module Info.....	17
2-4-2-3 Advanced.....	18
2-4-3 Console Port Information.....	19
2-4-4 Port Controls.....	20
2-4-5 Trunking.....	22
2-4-5-1 Aggregator setting.....	22
2-4-5-2 Aggregator Information.....	23
2-4-5-3 State Activity.....	24
2-4-6. Filter Database.....	25
2-4-6-1. IGMP Snooping.....	26
2-4-6-2. Static MAC Address.....	26
2-4-6-3 MAC filtering.....	26
2-4-7. VLAN configuration.....	28
2-4-7-1. Port Based VLAN.....	30
2-4-7-2. 802.1Q VLAN.....	30
2-4-8. Spanning Tree.....	35
2-4-9. Port Sniffer.....	38
2-4-10. SNMP/Trap Manager.....	38
2-4-11 Security Manager.....	41

2-4-12 802.1x Configuration	42
2-5. TFTP Update Firmware	45
2-6-1. TFTP Restore Configuration	46
2-6-2. TFTP Backup Configuration	46
2-7. Reset System.....	47
2-8. Reboot.....	47
3. Console -- 1K Xmodem update firmware	48
4. Out-of-band Terminal mode management	51
4-1 Main Menu	52
4-2 Switch Static Configuration.....	53
4-2-1. Port Configuration	54
4-2-2. Trunk Configuration.....	56
4-2-3. VLAN Configuration	57
4-2-3-1. VLAN Configure	57
4-2-3-2. Create a VLAN Group	59
4-2-3-3. Edit / Delete a VLAN Group	61
4-2-3-4. Groups Sorted Mode	62
4-2-4. Misc Configuration	63
4-2-4-1. MAC Age Interval.....	63
4-2-4-2. Broadcast Storm Filtering	64
4-2-4-3. Max bridge transmit delay bound	65
4-2-4-4. Port Security.....	65
4-2-4-4. Collision s Retry Forever	66
4-2-5. Administration Configuration.....	68
4-2-5-1. Change Username	68
4-2-5-2. Change Password	69
4-2-5-3. Device Information	69
4-2-5-4. IP Configuration.....	70
4-2-7. Priority Configuration	72
4-2-7-1. Port Static Priority.....	72
4-2-7-2. 802.1p Priority Configuration	73
4-2-8. MAC Address Configuration	74
4-2-8-1. Static MAC Address	744
4-2-8-2. Filtering MAC Address.....	81
4-3. Protocol Related Configuration.....	81
4-3-1. STP.....	812
4-3-1-1. STP Enable.....	822
4-3-1-2. STP System Configuration.....	84
4-3-1-3. Perport Configuration	84

4-3-2. SNMP.....	85
4-3-2-1. System Options	85
4-3-2-2. Community Strings	87
4-3-2-3. Trap Managers	90
4-3-3. GVRP.....	93
4-3-4. IGMP	94
4-3-5-1. Working Port Setting.....	95
4-3-5-2. State Activity.....	96
4-3-5-3. LACP Status.....	97
4-3-6. 802.1x Protocol.....	98
4-3-6-1. 802.1x Enable	98
4-3-6-2. 802.1x System Configuration	99
4-3-6-3. 802.1x Misc Configuration	100
4-4. Status and Counters	101
4-4-1. Port Status.....	101
4-4-2. Port Counters.....	102
4-4-3. System Information.....	103
4-5. Reboot Switch.....	104
4-5-1. Default	104
4-5-2. Restart	104
4-6. TFTP Update Firmware.....	105
4-6-1. TFTP Update Firmware	105
4-6-2. Restore Configure File	106
4-6-3. Backup Configure File	107
5.0 Application Examples	108
5.1 VLAN application used with switch.....	108
5.2 Trunking Application used with switch	110

1. Introduction

24+2G switch is a high performance web-managed SNMP Layer 2 switch that provides users with 24 10/100Mbps Ethernet and 2 1000Mbps Gigabit ports. This Switch has SNMP management and remote control capabilities. The Gigabit module, which can be copper or fiber media, supports 1000BASE-SX, 1000BASE-LX or 1000BASE-T, allowing users to increase their network response time at gigabit speeds and with great flexibility. A RS-232 serial port provides an easy way for installation and initial set-up.

Non-blocking and maximum wire speed performances are designed on all ports. The Switch not only supports Auto-Negotiation, but also Auto-MDIX function on all switched 24 10/100M RJ-45 ports and two Gigabit Copper ports in both half or full duplex mode. The Auto-MDIX function makes it convenient for the user, because it eliminates cabling on straight-line or cross-line issues.

24+2G switch provides a convenient way to operate layer 2 management through the browser. The User-friendly drop-down menu allows the user to easily learn, control and monitor. It supports not only traditional SNMP function, but also RMON 1,2,3,9 groups for advanced network analysis.

The Switch also supports both port-based VLAN and Tag-based. To increase bandwidth application, it supports 7 groups with up to 4 ports Trunk, and moreover, these trunk ports provide fair-over function to provide back up when one or more ports malfunction.

Totally front access design and full LED status display ease user's installation and inspection and maintenance efforts at rackmount environments. The extra LED display reflecting the fan status allows for quick diagnosis of over-heat issues.

1.1 Unpacking

Open the shipping carton of the Switch and carefully unpack its contents, the carton should contain the following items:

- One 24+2G, 24 port Fast Ethernet Layer 2 Switch.
- Mounting Kit: 2 mounting brackets and screws
- Four rubber feet with adhesive backing.
- One AC power cord.
- One RS-232 cable
- This Quick Installation Guide and CD.

1.2 Installation

Follow the guidelines below to install the Switch.

- Do not place any object weighted more than 3Kg (6.6 lb) on the Switch.
- Connect the power cord to the Switch and the power outlet.
- Leave at least 10 cm (4 inches) of space around the Switch for heat dissipation.

Desktop or Shelf Installation:

When installing the Switch on the desktop or shelf, please attach the rubber feet to the Switch. Peel off the protective paper on the pads and attach them on the bottom of the Switch (one at each corner).

Rack Installation:

The 24+2G Switch is rack-mountable and you can install the Switch on an EIA-19 inch equipment rack. To do this, first install the mounting brackets on the Switch's side panels (one on each side), secure them with the included screws, and then use the screws provided with the equipment rack to mount the Switch on the rack.

Power On the Switch:

The 24+2G Switch has a universal power supply and you can power up the Switch with 90 ~ 260V AC, 50 ~ 60Hz power source. The AC power cord connector is located at the rear of the unit and the On/Off switch is next to the connector. Connect the power cord from the power outlet to the Switch and push the On/Off Switch to “ON” position to power on the Switch. After the Switch is powered on, it will perform “self-diagnostic” (POSD). This process takes about 100 seconds to complete, during this process, the “DIAG” LED will blink green and the Switch will not response to any configuration program and all the connections to the Switch will not be available. When the processed is completed, the “DIAG” LED will stay solid green.

Below is a table that describes the meaning of each LED indicator.

LED indicators information

LED		Color	Status	
			Solid	Blinking
Power		Green	Power is applied to this device	N/A
DIAG		Green	Self diagnostic successful	Performing self diagnostic (after Power On)
Cooling Fans	FAN1	Red	Left cooling fan failed	N/A
	FAN2	Red	Right cooling fan failed	N/A
LINK/ACT (1 ~24 port)		Green	10Mbps Ethernet connection speed	TX/RX activity or Collision
100M (1 ~24 port)		Green	100Mbps Fast Ethernet connection speed	N/A
		Off	10Mbps connection speed	N/A
10/100/1000Mbps Copper Gigabit Port (Optional Module)				
Top LED		Orange	100Mbps Fast Ethernet connection speed (with Middle LED off)	N/A
Middle LED		Green	10Mbps Ethernet connection. (with Top LED off)	N/A
Bottom LED		Green	N/A	TX/RX activity or collision
Top+Middle LEDs		Orange + Green	1000Mbps Gigabit connection speed	N/A

1.3 Initial set up for management

There are two ways to perform the initial setup for the Switch; one is “Out-of-Band Configuration” (connect your PC’s serial port to the Switch’s console port with the included RS-232 serial cable and run terminal communication program) and the other is “In-Band Configuration” (network a PC to the Switch and run web browser or telnet). The sections below show the instructions on how to perform both operations.

1.3.1 Out-of-Band Terminal Mode Configuration

If you are using Microsoft Windows, boot up the computer, go to “Start”, “Programs”, “Accessories”, “Communications”, and open the “HyperTerminal”. After that follow the instructions below to setup a new terminal connection for the Switch. If you are using other communication software, please select correct COM port and setup the connection properties according to step 3 below.

1. Type in a name for the connection (e.g. SNMP Switch), select an icon for the connection, and click “OK”.
2. Select the COM port that you are using for this connection and click “OK”.
3. Setup the COM port properties by using the information below and click “OK”.

Bits Rate per Second = 9600

Data Bits = 8

Parity = None

Stop Bit = 1

Flow Control = None

4. Connect the included serial cable from the computer’s COM port to the Switch’s console port.
5. Power on the Switch and you will see some messages displayed on the “HypertTerminal”. The Switch’s Power On Self Diagnostic (POSD) takes about 90 seconds. After that, you will see the login screen.

If the Switch is already powered on and finished its self-diagnostic, after running the terminal communication program, please hit “Enter” once to get the login screen.

6. At “username” field type in **admin** and hit “Enter”.
7. At “password” field type in **123** and hit “Enter”. You are now login to the Switch’s configuration program.
8. On the lower portion of the screen, you will see descriptions of the navigation keys (e.g. Tab, Space Bar, and Enter). Please use these keys to move around the configuration program.


```
User Interface
Intelligent 24 + 2 Switch
```

```
username :
```

```
password :
```

1.3.2 In-band management through ethernet

In addition to terminal mode configuration, 24+2G Switch also supports In-Band Configuration using Web Browser. Compare with terminal mode configuration, web browser configuration is easier. You can simply connect the network-ready PC to the Switch, open the web browser, go to the Switch's configuration page (Switch's IP address), and configure the Switch by clicking on the subject on the menu.

Before you can access the switch through in-band, you must make sure the computer connecting to the Switch has a web browser and the TCP/IP protocol (with valid IP address) is bound to the network adapter. After that, you can either change your computer's IP address to the same class as the Switch's IP address, or you can login the Switch with the "out-of-band" method described in the previous section and configure the Switch's IP address to the same class as your computer's IP address.

Below, is the Switch's default IP information:

IP Address: 192.168.223.100

Subnet Mask: 255.255.248.0

Gateway: 192.168.223.254

Modify Switch's IP address via Out-of-Band method

1. Login the console (note: default User Name: admin, Password: 123).
2. Use "Tab" key to select (highlight) "Switch Static Configuration" and hit "Enter".
3. Use "Tab" key to select "Administration Configuration" and hit "Enter".
4. Use "Tab" key to select "IP Configuration" and hit "Enter".
5. Use "Tab" key to select "Edit" and hit "Enter".
6. Use "Tab" key to highlight "IP Address", enter the desired IP address (e.g. 192.168.1.100), and hit

“Enter”.

7. The “Subnet Mask” is now highlighted, enter the correct subnet mask, and hit “Enter”.
8. Input the Gateway address and hit “Enter”.
9. Press and hold “Ctrl” and then hit “A” to go to the “Action Menu”.
10. Use “Tab” key to select “Save” and hit “Enter”.
11. The screen will prompt you to “restart the system...”, turn off the Switch, wait for 10 seconds, and then turn the Switch’s power back on.

After the Switch finishes the self-diagnostic, open your computer’s web browser and at the “Address:” field, enter the Switch’s IP address (e.g. **http://192.168.1.100**), hit “Enter” or click on “Go”, and the Switch’s configuration page will prompt you to enter “User Name” and Password” to login.
(Note: default User Name: **admin**, Password: **123**).

Modify Network Adapter’s IP address

You can change the network adapter’s IP address in the Network Adapter’s “Properties”. We suggest that you change the network adapter’s IP to the following settings:


IP Address: 192.168.223.101

Subnet Mask: 255.255.248.0

(Note: you don’t need to enter Gateway address at this moment.)

Reboot the computer if necessary. After the computer boots back up, open the web browser and at the “Address” field, enter **http://192.168.223.100** , hit “Enter” or click on “Go”, and the Switch’s configuration page will prompt you to enter “User Name” and Password” to login.

(Note: default User Name: **admin**, Password: **123**).

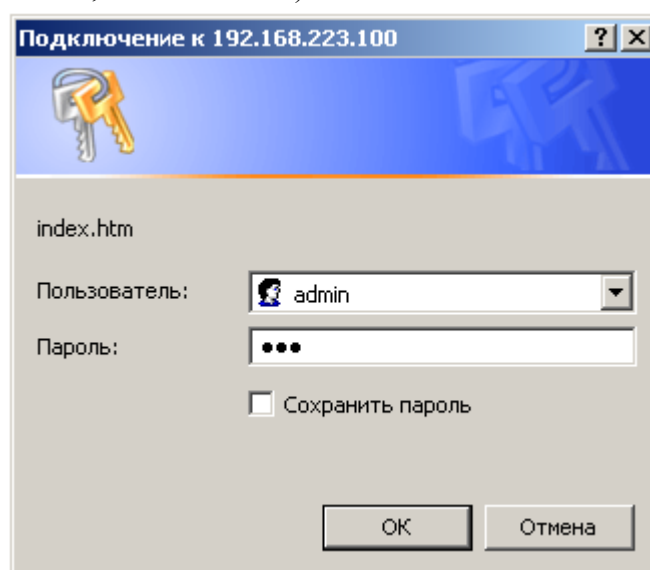


1.3.3 Telnet management

In addition to local terminal mode operation, 24+2G switch supports remote management through Telnet over network or even over internet for those environment without browser. In this mode, user also has to do the same setting as required in in-band management to the IP Configuration before executing the Telnet program. Again, after proper setting to the switch, save the setting and connect your Ethernet cable from your PC to any port of the ethernet Switch, then you can simply typing as following at the command line to access the switch:

Telnet IP_Address_of_Switch

The following dialogue below appears. Type user name and password to get further service. To find out more operation in this mode, please refer the instructions in chapter 3 of this manual to perform all function you want.

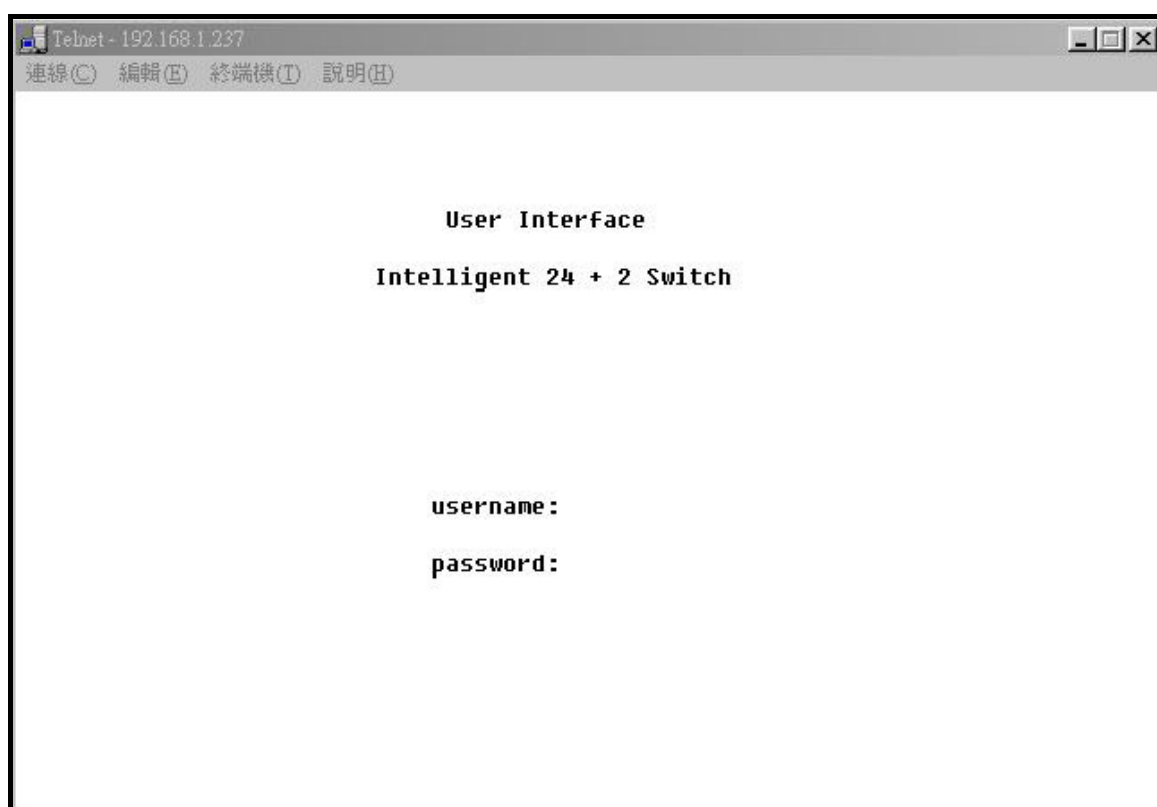

2. Web Management Function

2-1. Web Management Home Overview

This is a Home Page.



At this page, you may see the link status from image of front panel, every port will be with a **connector icon** if this port is really linked with others, you also may click the function that listed at left. Below are the explanation of each function:

2-2. Port status

2-3. Port Statistics

2-4. Administrator

2-5. TFTP Update Firmware

2-6. Configuration Backup

2-7. Reset System

2-8. Reboot

2-2. Port status

This page provides current status of every port that depends on user's setting and the negotiation result.

Port Status

The following information provides a view of the current status of the unit.


Port	State		Link	Negotiation		Speed		Duplex		Flow Control			Rate Control(100K)		Priority	Security
	Config	Atual		Config	Atual	Config	Atual	Config	Atual	Config		Atual	Atual			
										Full	Half		Ingr	Egr		
PORT1	On	On	Down	Auto	Auto	100	100	Full	Full	On	On	On	Off	Off	Disable	Off
PORT2	On	On	Down	Auto	Auto	100	100	Full	Full	On	On	On	Off	Off	Disable	Off
PORT3	On	On	Down	Auto	Auto	100	100	Full	Full	On	On	On	Off	Off	Disable	Off
PORT4	On	On	Down	Auto	Auto	100	100	Full	Full	On	On	On	Off	Off	Disable	Off
PORT5	On	On	Down	Auto	Auto	100	100	Full	Full	On	On	On	Off	Off	Disable	Off
PORT6	On	On	Up	Auto	Auto	100	100	Full	Full	On	On	On	Off	Off	Disable	Off
PORT7	On	On	Down	Auto	Auto	100	100	Full	Full	On	On	On	Off	Off	Disable	Off
PORT8	On	On	Down	Auto	Auto	100	100	Full	Full	On	On	On	Off	Off	Disable	Off
PORT9	On	On	Down	Auto	Auto	100	100	Full	Full	On	On	On	Off	Off	Disable	Off
PORT10	On	On	Down	Auto	Auto	100	100	Full	Full	On	On	On	Off	Off	Disable	Off
PORT11	On	On	Down	Auto	Auto	100	100	Full	Full	On	On	On	Off	Off	Disable	Off
PORT12	On	On	Down	Auto	Auto	100	100	Full	Full	On	On	On	Off	Off	Disable	Off
PORT13	On	On	Down	Auto	Auto	100	100	Full	Full	On	On	On	Off	Off	Disable	Off
PORT14	On	On	Down	Auto	Auto	100	100	Full	Full	On	On	On	Off	Off	Disable	Off
PORT15	On	On	Down	Auto	Auto	100	100	Full	Full	On	On	On	Off	Off	Disable	Off
PORT16	On	On	Down	Auto	Auto	100	100	Full	Full	On	On	On	Off	Off	Disable	Off
PORT17	On	On	Down	Auto	Auto	100	100	Full	Full	On	On	On	Off	Off	Disable	Off
PORT18	On	On	Down	Auto	Auto	100	100	Full	Full	On	On	On	Off	Off	Disable	Off
PORT19	On	On	Down	Auto	Auto	100	100	Full	Full	On	On	On	Off	Off	Disable	Off
PORT20	On	On	Down	Auto	Auto	100	100	Full	Full	On	On	On	Off	Off	Disable	Off

1. **State:** Display port statuses: **disable or enable**. "Unlink" will be treated as "off".
2. **Link Status:** Down means "No Link", UP means "Link".
3. **Auto Negotiation:** Display the auto negotiation mode: auto/force/nway-force.
4. **Speed status:** Display 1000Mbps or 100Mbps or 10Mbps speed, port 1- 24 are 10/100Mbps, Port 25-26 are 10/100/1000Mbps.
5. **Duplex status:** Display full-duplex or half-duplex mode.
6. **Flow Control:** Full: Display the flow control is enabled or disabled in full mode.
Half: Display the backpressure is enabled or disabled in half mode.
7. **Rate Control:** Display the rate control setting.
Ingr: Display the port effective ingress rate of user setting.
Egr: Display the port effective egress rate of user setting.
8. **Port Security:** Display the port security is enabled or disabled.
9. **Config:** Display the state of user setting.
10. **Atual:** Display the negotiation result.

2.2.1 single port counter and status as flows

User can also click the any port directly on the front panel of Home Page

to get single port Status which is shown below.

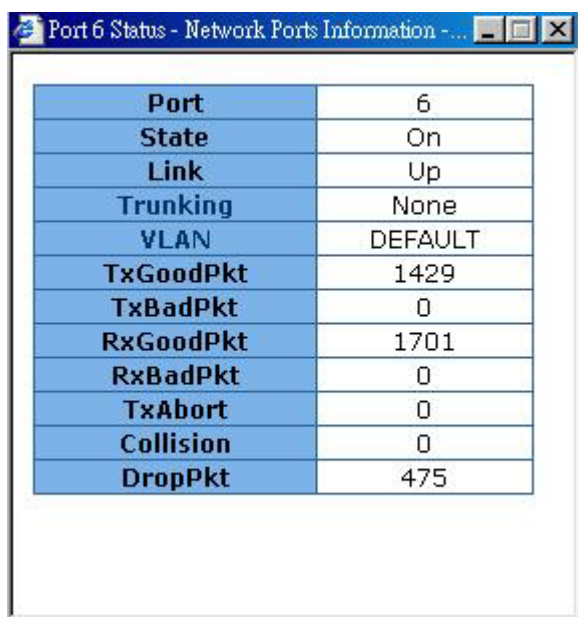

Port	6
State	On
Link	Up
Trunking	None
VLAN	DEFAULT
TxGoodPkt	1429
TxBadPkt	0
RxGoodPkt	1701
RxBadPkt	0
TxAbort	0
Collision	0
DropPkt	475

2-3. Port Statistics

The following information provides a view of the current status of the whole unit.
Press “Reset” button to clean all count.

Port Statistics									
The following information provides a view of the current status of the unit.									
Port	State	Link	TxGoodPkt	TxBadPkt	RxGoodPkt	RxBadPkt	TxAbort	Collision	DropPkt
PORT1	On	Down	0	0	0	0	0	0	0
PORT2	On	Down	0	0	0	0	0	0	0
PORT3	On	Down	0	0	0	0	0	0	0
PORT4	On	Down	0	0	0	0	0	0	0
PORT5	On	Down	0	0	0	0	0	0	0
PORT6	On	Up	11639	0	13896	0	0	0	4078
PORT7	On	Down	0	0	0	0	0	0	0
PORT8	On	Down	0	0	0	0	0	0	0
PORT9	On	Down	0	0	0	0	0	0	0
PORT10	On	Down	0	0	0	0	0	0	0
PORT11	On	Down	0	0	0	0	0	0	0
PORT12	On	Down	0	0	0	0	0	0	0
PORT13	On	Down	0	0	0	0	0	0	0
PORT14	On	Down	0	0	0	0	0	0	0
<input type="button" value="Reset"/>									

2-4. Administrator

There are many management functions can be set or performed if you click the **Adminisatrtror** on Home Page, including:

- ◆ IP address/Subnet Mask/Gateway
- ◆ Switch settings
- ◆ Console port information
- ◆ Port controls
- ◆ Trunking
- ◆ Filter database
- ◆ VLAN configuration
- ◆ Spanning tree
- ◆ Port Sniffer
- ◆ SNMP/Trap Manager
- ◆ Security Manager
- ◆ 802.1x Configuration

2-4-1. IP Address/Subnet Mask/Gateway

User can modify the IP Settings by filling with the new value, then clicks “apply” button to confirm(save) his setting, then he must **reboot** switch, then new IP configuration Value are activated. **[note] If any of the value is changed in this field, reboot is necessary.**



Set IP Addresses	
DHCP :	Disable
IP Address	192.168.223.100
Subnet_Mask	255.255.255.0
Gateway	192.168.223.254
<input type="button" value="Apply"/> <input type="button" value="Help"/>	


2-4-2-1 Basic

Description: Display the name of device type.

Firmware Version: Display the switch's firmware version.

Default config value version: Display write to default EEPROM value version.

2-4-2-2 Module Info



Switch Settings

[Basic](#)
[Module Info](#)
[Advanced](#)

	TYPE	DESCRIPTION
Module1	100TX	100TX-approve
Module2	100TX	N/A

2-4-2-3 Advanced


◆ Miscellaneous Setting:

MAC Address Age-out Time: Type the number of seconds that an inactive MAC address remains in the switch's address table. The valid range is 300~765 seconds. Default is 300 seconds.

Max bridge transit delay bound control: Limit the packets queuing time in switch. If enable, the packets queued exceed will be drop. These valid values are 1sec, 2 sec, 4 sec and off. Default is 1 seconds.

NOTE: Make sure of “Max bridge transit delay bound control” is enabled before enable Delay Bound, because Enable Delay Bound must be work under “Max bridge transit delay bound control is enabled” situation.

Broadcast Storm Filter: To configure broadcast storm control, enable it and set the upper threshold for individual ports. The threshold is the percentage of the port's total bandwidth used by broadcast traffic. When broadcast traffic for a port rises above the threshold you set, broadcast storm control becomes active. The valid threshold value are 5%, 10%, 15%, 20%, 25% and off.

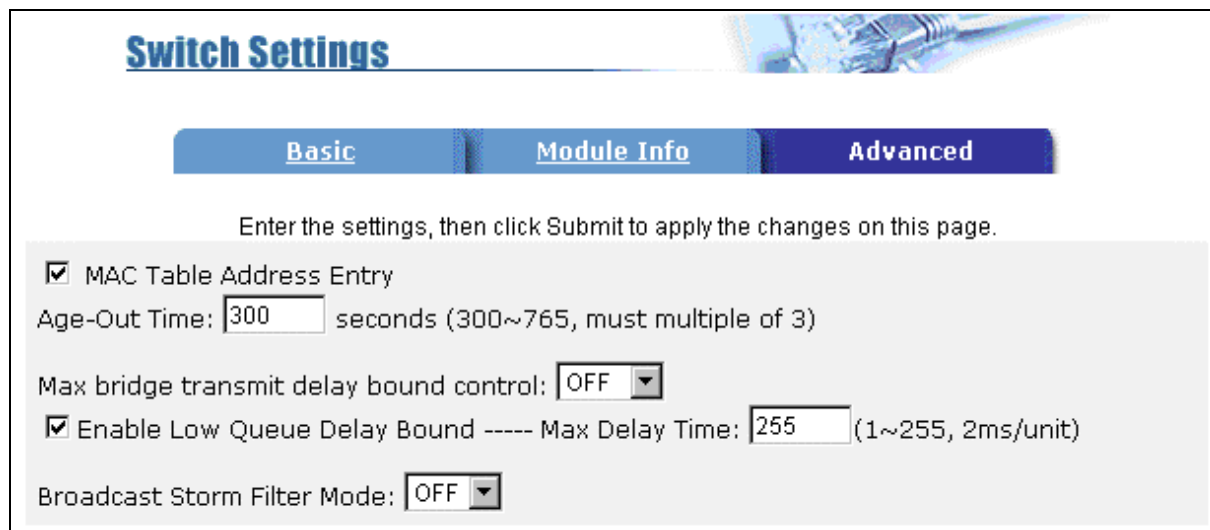

The screenshot shows the 'Switch Settings' web interface with the 'Advanced' tab selected. The interface includes a header with 'Switch Settings' and a navigation bar with 'Basic', 'Module Info', and 'Advanced' tabs. Below the tabs, there is a instruction: 'Enter the settings, then click Submit to apply the changes on this page.' The settings are as follows:

- ☒ MAC Table Address Entry
- Age-Out Time: seconds (300~765, must multiple of 3)
- Max bridge transmit delay bound control: (dropdown menu)
- ☒ Enable Low Queue Delay Bound ----- Max Delay Time: (1~255, 2ms/unit)
- Broadcast Storm Filter Mode: (dropdown menu)

◆ Priority Queue Service settings:

First Come First Service: The sequence of packets sent is depending on arrive orders.

All High before Low: The high priority packets sent before low priority packets.

WRR: Weighted Round Robin. Select the preference given to packets in the switch's high-priority queue. These options represent the number of high priority packets sent before one low priority packet is sent. For example, 5 High : 2 Low means that the switch sends 5 high-priority packets before sending 2 low- priority packets.

Enable Delay Bound: Limit the low priority packets queuing time in switch. Default Max Delay Time is 255ms. If the low priority packet stays in switch exceed Max Delay Time, it will be sent. The valid range is 1-255ms.

Qos Policy: High Priority Levels: 0~7 priority level can map to high or low queue.

Collisions Retry Forever:

Disable – In half duplex, collision-retry maximum is 48 times and packet will be dropped if collision still happen.

Enable – In half duplex, if happen collision will retry forever.

802.1x Protocol: Enable or disable 802.1x protocol.

Priority Queue Service:

802.1p Priority

☒ Fisrt Come First Service

☐ All High before Low

☐ WRR ----- High weight: Low weight:

Qos Policy: High Priority Levels

☐ Level0

☐ Level1

☐ Level2

☐ Level3

☒ Level4

☒ Level5

☒ Level6

☒ Level7

Collisions Retry Forever :

Disable

802.1x Protocol :

Disable

Apply

Default

Help

2-4-3 Console Port Information

Console is a standard UART interface to communicate with Serial Port.

User can use windows HyperTerminal program to link the switch. Connect To -> Configure:



WWW : <http://www.dci.com.ua>
Email : info@dci.com.ua, sales@dci.com.ua, support@dci.com.ua

Bits per seconds: 9600

Data bits: 8

Parity: none

Stop Bits: 1

Flow control: none

Console Information

Baurate(bits/sec)	9600
Data Bits	8
Parity Check	none
Stop Bits	1
Flow Control	none

2-4-4 Port Controls

User may modify or change mode operation in this page.

Port Controls

Port	State	Negotiation	Speed	Duplex	Flow Control		Rate Control (100K)		Priority	Security
					Full	Half	Ingress	Egress		
PORT3	Enable	Auto	100	Full	Enable	Enable	0	0	Disable	<input type="checkbox"/>
PORT4										
PORT5										
PORT6										

Apply

Port	State		Link	Negotiation		Speed		Duplex		Flow Control			Rate Control(100K)		Priority	Security
	Config	Atual		Config	Atual	Config	Atual	Config		Atual	Atual					
								Full	Half		Ingr	Egr				
PORT6	On	On	Up	Auto	Auto	100	100	Full	Full	On	On	On	Off	Off	Disable	Off

1. **State:** User can disable or enable this port control.
2. **Auto Negotiation:** User can set auto negotiation mode is Auto, Nway (specify the speed/duplex on this port and enable auto-negotiation), Force of per port.
3. **Speed:**

User can set 100Mbps or 10Mbps speed on Port1~Port24.

User can set 1000Mbps, 100Mbps or 10Mbps speed on Port25~Port26 (depend on module card mode).

4. **Duplex:** User can set full-duplex or half-duplex mode of per port.

5. **Flows control:**

Full: User can set flow control function is enable or disable in full mode.

Half: User can set backpressure is enable or disable in half mode.

6. **Rate Control:** port1 ~ port 24, supports by-port ingress and egress rate control. For example, assume port 1 is 10Mbps, users can set it's effective egress rate at 1Mbps and ingress rate at 500Kbps. Device will perform flow control or backpressure to confine the ingress rate to meet the specified rate.

Ingress: Type the port effective ingress rate. The valid range is 0 ~ 1000. The unit is 100K.

0: disable rate control.

1 ~ 1000: valid rate value

Egress: Type the port effective egress rate. The valid range is 0~1000. The unit is 100K.

0: disable rate control.

1 ~ 1000: valid rate value.


7. **Port Priority:**

8. **Port Security:** A port in security mode will be “locked” without permission of address learning. Only the incoming packets with SMAC already existing in the address table can be forwarded normally. User can disable the port from learning any new MAC addresses, then use the static MAC addresses screen to define a list of MAC addresses that can use the secure port. Enter the settings, then click Apply button to change on this page.

2-4-5 Trunking

The Link Aggregation Control Protocol (LACP) provides a standardized means for exchanging information between Partner Systems on a link to allow their Link Aggregation Control instances to reach agreement on the identity of the Link Aggregation Group to which the link belongs, move the link to that Link Aggregation Group, and enable its transmission and reception functions in an orderly manner. In conclusion, Link aggregation lets you group up to eight consecutive ports into a single dedicated connection. This feature can expand bandwidth to a device on the network. **LACP operation requires full-duplex mode**, more detail information refers to IEEE 802.3ad

2-4-5-1 Aggregator setting

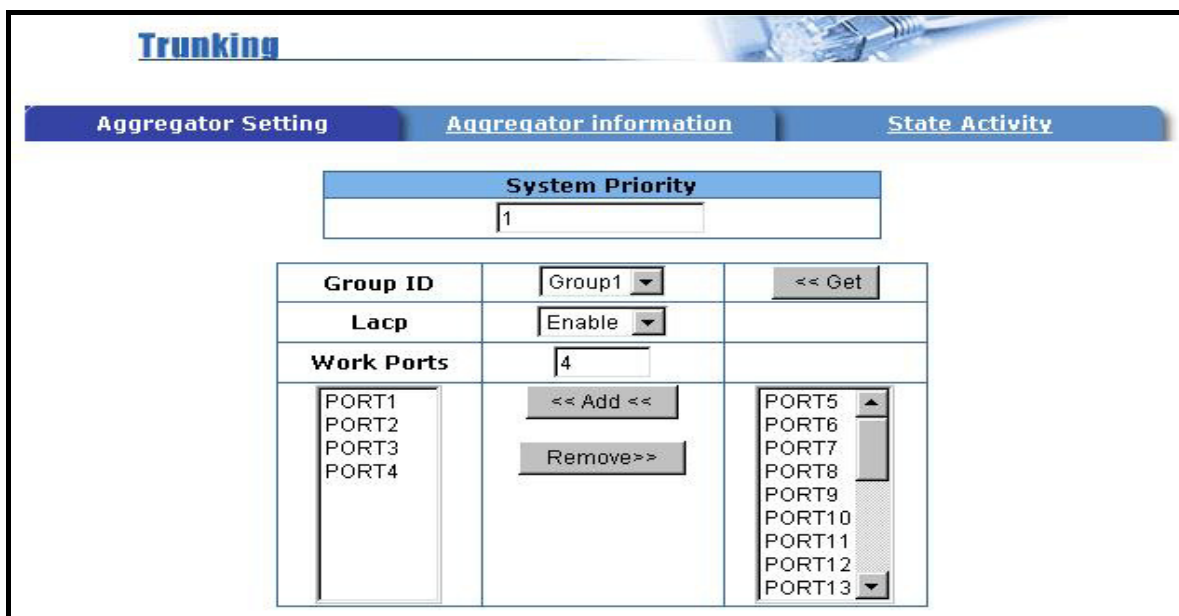

The screenshot displays the 'Trunking' configuration page with the 'Aggregator Setting' tab selected. The interface includes a 'System Priority' field set to 1, a 'Group ID' dropdown menu set to 'Group1', and a 'Lacp' dropdown menu set to 'Enable'. Below these, the 'Work Ports' section shows a list of ports (PORT1 to PORT4) and buttons for '<< Add <<' and 'Remove >>'. A separate list of ports (PORT5 to PORT13) is visible on the right side of the interface.

1. **System Priority:** A value used to identify the active LACP. The switch with the lowest value has the highest priority and is selected as the active LACP.
2. **Group ID:** There are seven trunk groups to provided configure. Choose the "group id" and click "Get".
3. **LACP:** If enable, the group is LACP static trunking group. If disable, the group is local static trunking group. All ports support LACP dynamic trunking group. If connecting to the device that also supports LACP, the LACP dynamic trunking group will be created automatically.
4. **Work ports:** Allow max four ports can be aggregated at the same time. If LACP static trunking group, the exceed ports is standby and able to aggregate if work ports fail. If local static trunking group, the number must be as same as the group member ports.
5. Select the ports to join the trunking group. Allow max four ports can be aggregated at the same time.
6. If LACP enable, you can configure LACP Active/Passive status in each port on State Activity page.
7. Click Apply.

2-4-5-2 Aggregator Information

When you are setting LACP aggregator, you can see relation information in here.

1. This page is no group active. LACP don't working.

Trunking

Aggregator Setting **Aggregator information** **State Activity**

The following information provides a view of LACP current status.

NO GROUP ACTIVE

2. This page is Static Trunking groups.

Trunking

Aggregator Setting **Aggregator information** **State Activity**

The following information provides a view of LACP current status.

Static Trunking Group				
Group Key	1			
Port_No	1	2	3	4

Static Trunking Group				
Group Key	2			
Port_No	9	10	11	12

3. This page is Actor and Partner trunking one group.

Trunking

Aggregator Setting **Aggregator information** **State Activity**

The following information provides a view of LACP current status.

Group2									
Actor					Partner				
Priority	1				1				
MAC	004063809988				004063808899				
PortNo	Key	Priority	Active	PortNo	Key	Priority			
PORT5	514	1	selected	PORT5	514	1			
PORT6	514	1	selected	PORT6	514	1			
PORT7	514	1	selected	PORT7	514	1			
PORT8	514	1	selected	PORT8	514	1			

2-4-5-3 State Activity

Active (select): The port automatically sends LACP protocol packets.

N/A (no select): The port does not automatically send LACP protocol packets, and responds only if it receives LACP protocol packets from the opposite device.

1. A link that has either two active LACP ports or one active port can perform dynamic LACP trunking. A link has two N/A LACP ports will not perform dynamic LACP trunking because both ports are waiting for and LACP protocol packet from the opposite device.
2. If you are active LACP's actor, when you are select trunking port, the active status will be created automatically.

Port	LACP State Activity	Port	LACP State Activity
1	<input checked="" type="checkbox"/> Active	2	<input checked="" type="checkbox"/> Active
3	<input checked="" type="checkbox"/> Active	4	<input checked="" type="checkbox"/> Active
5	N/A	6	N/A
7	N/A	8	N/A
9	<input checked="" type="checkbox"/> Active	10	<input checked="" type="checkbox"/> Active
11	<input checked="" type="checkbox"/> Active	12	<input checked="" type="checkbox"/> Active
13	N/A	14	N/A
15	N/A	16	N/A
17	N/A	18	N/A
19	N/A	20	N/A
21	N/A	22	N/A
23	N/A	24	N/A
25	N/A	26	N/A

Apply Help

2-4-6. Filter Database

2-4-6-1. IGMP Snooping

The 24+2G switch supports multicast IP, one can enable IGMP protocol on web management's switch setting advanced page, then display the IGMP snooping information in this page, you can view difference multicast group, VID and member port in here, IP multicast addresses range from 224.0.0.0 through 239.255.255.255.

Forwarding and Filtering

IGMP Snooping Static MAC Addresses MAC Filtering

Multicast Group

Ip_Address _____ VID _____ MemberPort

224.001.001.002	0	*****8*****
224.001.001.003	0	*****8*****
224.001.001.004	0	*****8*****
224.001.001.005	0	*****8*****
224.001.001.006	0	*****8*****
224.001.001.007	0	*****8*****
224.001.001.008	0	*****8*****
224.001.001.009	0	*****8*****
224.001.001.010	0	*****8*****
224.001.001.011	0	*****8*****


IGMP Protocol:

The Internet Group Management Protocol (IGMP) is an internal protocol of the Internet Protocol (IP) suite. IP manages multicast traffic by using switches, routers, and hosts that support IGMP. Enabling IGMP allows the ports to detect IGMP queries and report packets and manage IP multicast traffic through the switch. IGMP have three fundamental types of message as follows:

Message	Description
Query	A message sent from the queries (IGMP router or switch) asking for a response from each host belonging multicast group.
Report	A message sent by a host to the queries to indicate that the host wants to be or is a member of a given group indicated in the report message.
Leave Group	A message sent by a host to the queries to indicate that the host has quit being a member of a specific multicast group.

2-4-6-2. Static MAC Address

When you add a static MAC address, it remains in the switch's address table, regardless of whether the device is physically connected to the switch. This saves the switch from having to re-learn a device's MAC address when the disconnected or powered-off device is active on the network again.

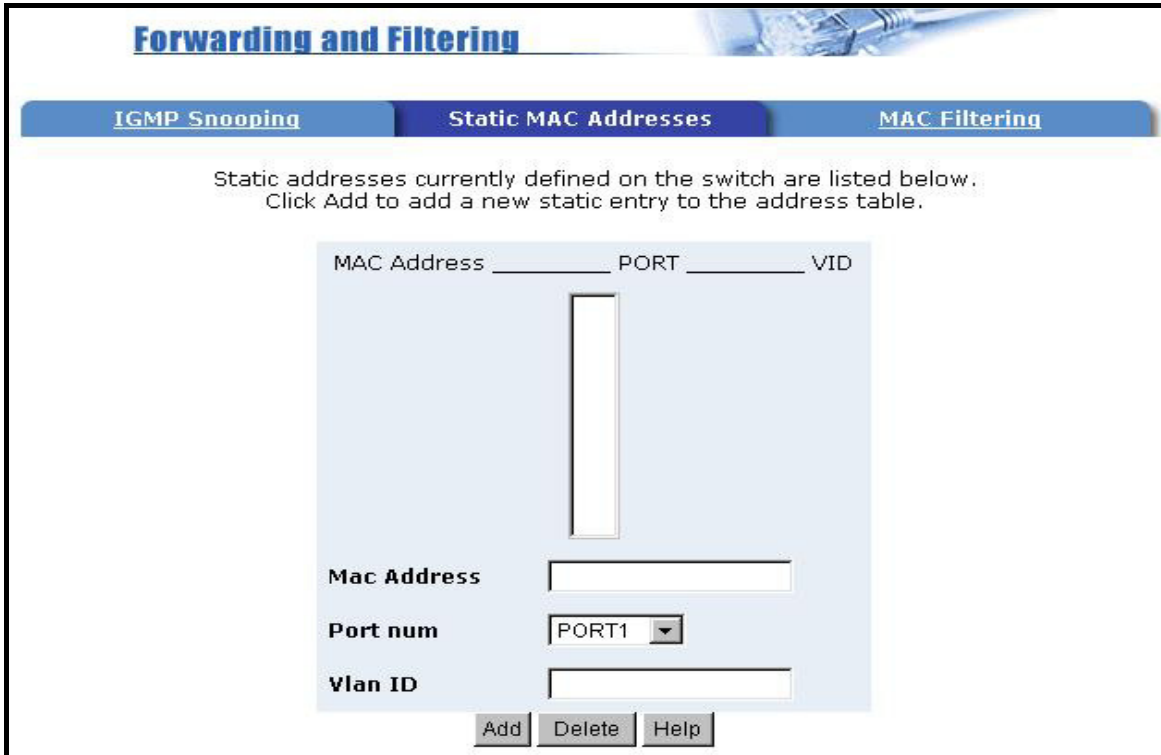

Forwarding and Filtering

IGMP Snooping **Static MAC Addresses** **MAC Filtering**

Static addresses currently defined on the switch are listed below.
Click Add to add a new static entry to the address table.

MAC Address	PORT	VID

Mac Address

Port num

Vlan ID

1. At the main menu, click administrator → Filter Database → Static MAC Address.
2. In the MAC address box, enter the MAC address to and from which the port should permanently forward traffic, regardless of the device's network activity.
3. In the Port Number box, enter a port number.
4. If tag-based (IEEE 802.1Q) VLANs are set up on the switch, static addresses are associated with individual VLANs. Type the VID (tag-based VLANs) to associate with the MAC address.
5. Click the Add.

2-4-6-3 MAC filtering

MAC address filtering allows the switch to drop unwanted traffic. Traffic is filtered based on the destination addresses.

Forwarding and Filtering

IGMP Snooping

Static MAC Addresses

MAC Filtering

Specify a MAC address to filter.

000000000001	1
000000000002	2
000000000003	3


Mac Address	<input type="text"/>
Vlan ID	<input type="text"/>

1. In the MAC Address box, enter the MAC address that wants to filter.
2. If tag-based (802.1Q) VLAN are set up on the switch, in the VLAN ID box, type the VID to associate with the MAC address.
3. Click the Add.
4. Choose the MAC address that you want to delete and then click the Delete.

2-4-7. VLAN configuration


A Virtual LAN (VLAN) is a logical network grouping that limits the broadcast domain. It allows you to isolate network traffic so only members of the VLAN receive traffic from the same VLAN members. Basically, creating a VLAN from a switch is logically equivalent of reconnecting a group of network devices to another Layer 2 switch. However, all the network devices are still plug into the same switch physically.

The 24+2G switch supports port-based, 802.1Q (tagged-based) and protocol-base VLAN in web management page. In the default configuration, VLAN support is disable.

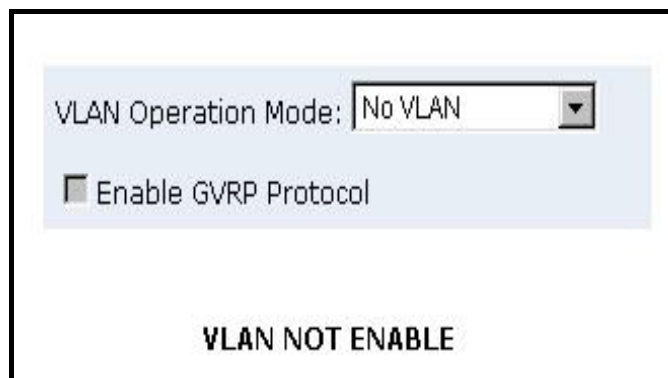


◆ Support Port-based VLAN

Packets can only be broadcast among only members of the same VLAN group. Note all unselected ports are treated as belonging to another single VLAN. If the port-based VLAN enabled, the VLAN-tagging is ignored.

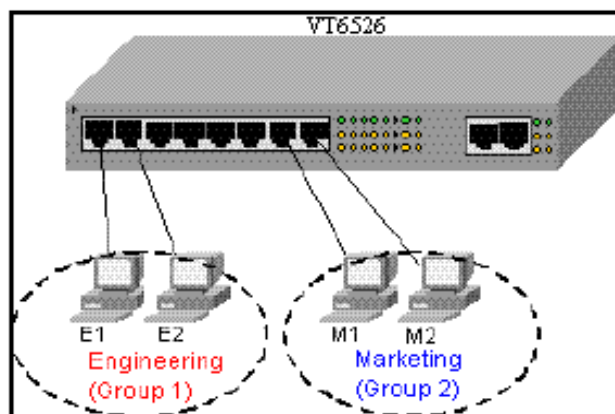

◆ Support Tag-based VLAN (IEEE 802.1Q VLAN)

Tagged-based VLAN is an IEEE 802.1Q specification standard. Therefore, it is possible to create a VLAN across devices from different switch vendors. IEEE 802.1Q VLAN uses a technique to insert a “tag” into the Ethernet frames. Tag contains a VLAN Identifier (VID) that indicates the VLAN numbers.

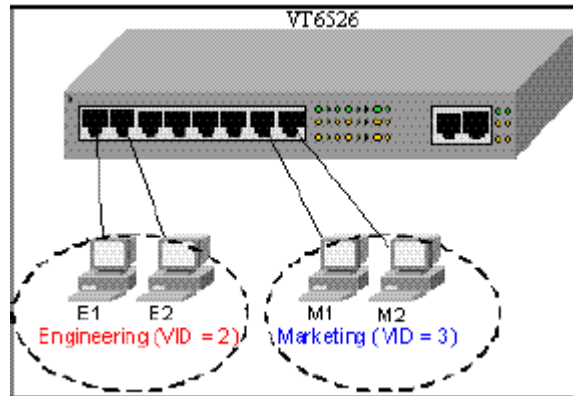


◆ Support Protocol-based VLAN

In order for an end station to send packets to different VLANs, it itself has to be either capable of tagging packets it sends with VLAN tags or attached to a VLAN-aware bridge that is capable of classifying and tagging the packet with different VLAN ID based on not only default PVID but also other information about the packet, such as the protocol.

24+2G switch will support protocol-based VLAN classification by means of both built-in knowledge of layer 2 packet formats used by selected popular protocols, such as Novell IPX and AppleTalk's EtherTalk, and some degree of programmable protocol matching capability.

2-4-7-1. Port Based VLAN

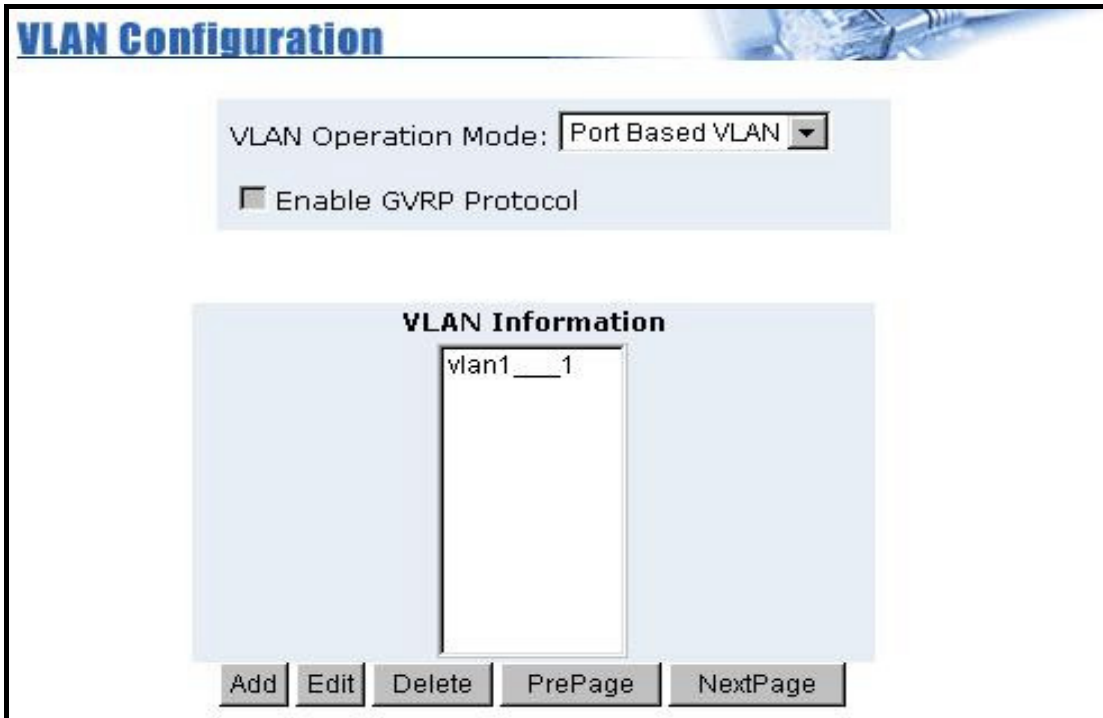

1. Click Add to create a new VLAN group.
2. Enter the VLAN name, group ID and select the members for the new VLAN.
3. Click Apply.
4. If there are many groups that over the limit of one page, you can click the “Next Page” to view other VLAN groups.


NOTE: If the trunk groups exist, you can see it (ex: TRK1, TRK2...) in select menu of ports, and you can configure it is the member of the VLAN or not.

2-4-7-2. 802.1Q VLAN

This page, user can create Tag-based VLAN, and enable or disable GVRP protocol.

There are 256 VLAN groups to provide configure. Enable 802.1Q VLAN, the all ports on the switch belong

to default VLAN, VID is 1. The default VLAN can't be delete.

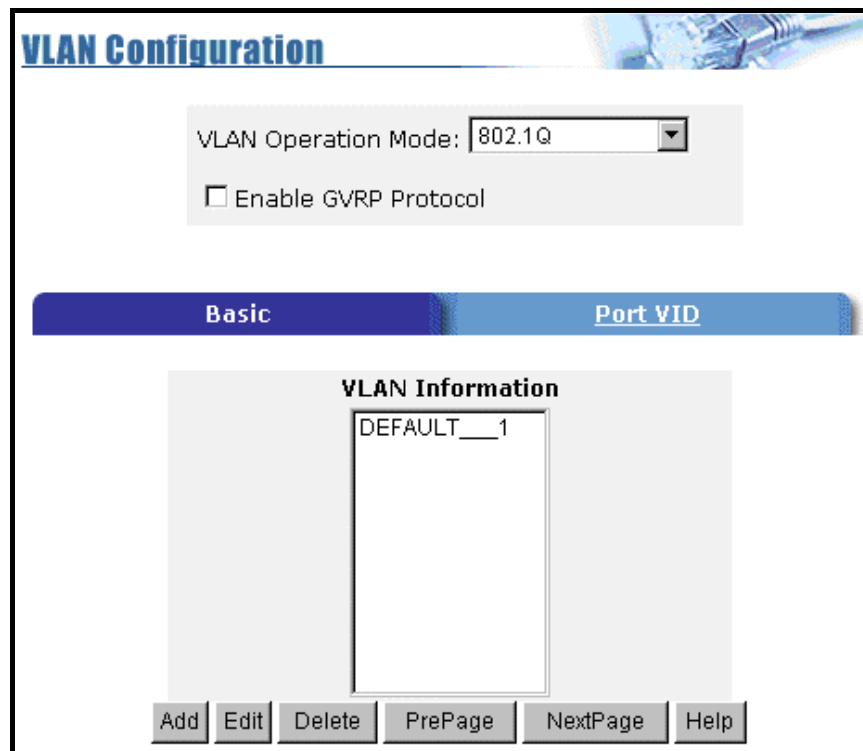

VLAN Configuration

VLAN Operation Mode: 802.1Q ▼

☐ Enable GVRP Protocol

Basic **Port VID**

VLAN Information

DEFAULT__1

Add Edit Delete PrePage NextPage Help


GVRP (GARP [Generic Attribute Registration Protocol] VLAN Registration Protocol)

GVRP allows automatic VLAN configuration between the switch and nodes. If the switch is connected to a device with GVRP enabled, you can send a GVRP request using the VID of a VLAN defined on the switch, the switch will automatically add that device to the existing VLAN.


◆Basic

Create a VLAN and add tagged member ports to it.

1. From the main menu, click Administrator →VLAN configuration, click Add then you will see the page as follow.

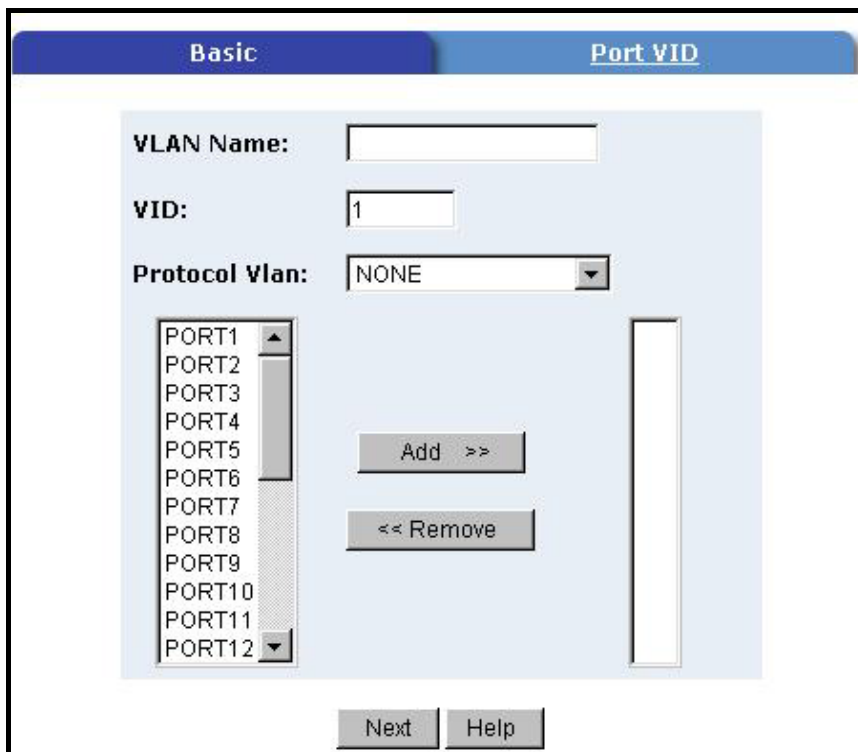

2. Type a name for the new VLAN.
3. Type a VID (between 2-4094). The default is 1.
4. Choose the protocol type.
5. From the Available ports box, select ports to add to the switch and click “Add >>”. If the trunk groups exist, you can see it in here (ex: TRK1, TRK2...), and you can configure it is the member of the VLAN or not.
6. Click Next. Then you can view the page as follow :

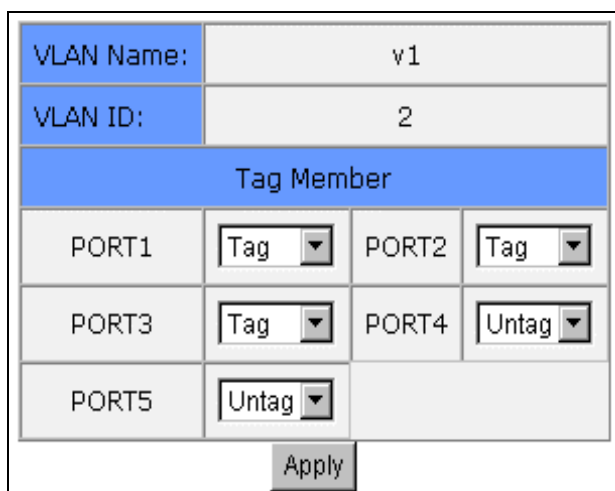

VLAN Name:	v1			
VLAN ID:	2			
Tag Member				
PORT1	Tag	PORT2	Tag	
PORT3	Tag	PORT4	Untag	
PORT5	Untag			
Apply				

7. Uses this page to set the outgoing frames are VLAN-Tagged frames or no. Then click Apply.

Tag: outgoing frames with VLAN-Tagged.

Untag: outgoing frames without VLAN-Tagged.

◆Port VID

Configure port VID settings

From the main Tag-based (IEEE 802.1Q) VLAN page, click Port VID Settings.

Basic

Port VID

Assign a Port VLAN ID (1~255) for untagged traffic on each port, then click Submit to apply the changes on this page.

Ingress Filtering Rule 1
(Forward only packets with VID matching this port's configured VID)

Ingress Filtering Rule 2
(Drop Untagged Frame)

NO	PVID	Ingress Filtering 1	Ingress Filtering 2
PORT1 PORT2 PORT3 PORT4	1	Enable	Disable
PORT1	1	ENABLE	DISABLE
PORT2	1	ENABLE	DISABLE
PORT3	1	ENABLE	DISABLE
PORT4	1	ENABLE	DISABLE

ApplyDefaultHelp

Port VID (PVID)

Set the port VLAN ID that will be assigned to untagged traffic on a given port. This feature is useful for accommodating devices that you want to participate in the VLAN but that don't support tagging. 24+2G switch each port allows user to set one PVID, the range is 1~255, default PVID is 1. The PVID must be the same as the VLAN ID that the port belongs to VLAN group, or the untagged traffic will be dropped.

Ingress Filtering

Ingress filtering lets frames belonging to a specific VLAN to be forwarded if the port belongs to that VLAN. 24+2G switch have two ingress filtering rule as follows:

Ingress Filtering Rule 1: A forward only packet with VID matching this port's configured VID.

Ingress Filtering Rule 2: Drop Untagged Frame.

2-4-8. Spanning Tree

The Spanning-Tree Protocol (STP) is a standardized method (IEEE 802.1D) for avoiding loops in switched networks. Enable STP to ensure that only one path at a time is active between any two nodes on the network.

You can enable Spanning-Tree Protocol on web management's switch setting advanced item, select enable Spanning-Tree protocol. We are recommended that you enable STP on all switches ensures a single active path on the network.

1. You can view spanning tree information about the Root Bridge. Such as follow screen.

Root Bridge Information	
Priority	32768
Mac Address	004063809988
Root_Path_Cost	0
Root Port	0
Max Age	20
Hello Time	2
Forward Delay	15

2. You can view spanning tree status about the switch. Such as follow screen.

STP Port Status			
PortNum	PathCost	Priority	PortState
PORT1	10	128	FORWARDING
PORT2	10	128	FORWARDING
PORT3	10	128	FORWARDING
PORT4	10	128	FORWARDING
PORT5	10	128	FORWARDING
PORT6	10	128	FORWARDING
PORT7	10	128	FORWARDING
PORT8	10	128	FORWARDING
PORT9	10	128	FORWARDING
PORT10	10	128	FORWARDING
PORT11	10	128	FORWARDING
PORT12	10	128	FORWARDING
PORT13	10	128	FORWARDING
PORT14	10	128	FORWARDING
PORT15	10	128	FORWARDING

3. You can setting new value for STP parameter, then click set Apply button to modify

Configure Spanning Tree Parameters	
STP State	<input checked="" type="checkbox"/>
Priority (0-65535)	<input type="text" value="32768"/>
Max Age (6-40)	<input type="text" value="20"/>
Hello Time (1-10)	<input type="text" value="2"/>
Forward_Delay_Time(4-30)	<input type="text" value="15"/>

Parameter	Description
Priority	You can change priority value, A value used to identify the root bridge. The bridge with lowest value has the highest priority and is selected as the root. Enter a number 1 through 65535.
Max Age	You can change Max Age value, The number of second bridge waits without receiving Spanning-Tree Protocol configuration messages before attempting a reconfiguration. Enter a number 6 through 40.
Hello Time	You can change Hello time value, the number of seconds among the transmission of Spanning-Tree Protocol configuration messages. Enter a number 1 through 10.
Forward Delay time	You can change forward delay time, The number of seconds a port waits before changing from its Spanning-Tree Protocol learning and listening states to the forwarding state. Enter a number 4 through 30.

4. The following parameter can be configured on each port , click set Apply button to modify

Port Number	Path Cost (1 - 65535; Default 10)	Priority (0 - 255; Default 128)
<div> <div>PORT1</div> <div>PORT2</div> <div>PORT3</div> <div>PORT4</div> <div>PORT5</div> </div>	<input type="text" value="10"/>	<input type="text" value="128"/>

Parameter	Description
Port Priority	You can make it more or less likely to become the root port, the rage is 0-255,default setting is 128 the lowest number has the highest priority.


Path Cost	Specifies the path cost of the port that switch uses to determine which port are the forwarding ports the lowest number is forwarding ports, the range is 1-65535 and default value based on IEEE802.1D 10Mb/s = 50-600 100Mb/s = 10-60 1000Mb/s = 3-10
------------------	---

2-4-9. Port Sniffer

The Port Sniffer is a method for monitor traffic in switched networks. Traffic through ports can be monitored by one specific port. That is, traffic goes in or out monitored ports will be duplicated into sniffer port.

1. **Sniffer Mode:** Press **Space** key to set sniffer mode: Disable \Rx \Tx \Both.
2. **Monitoring Port:** It' means sniffer port can be used to see all monitors port traffic. You can connect sniffer port to LAN analyzer or netxray.
3. **Monitored Port:** The ports you want to monitor. All monitor port traffic will be copied to sniffer port. You can select max 25 monitor ports in the switch. User can choose which port that they want to monitor in only one sniffer mode.

If you want to disable the function, you must select monitor port to none.

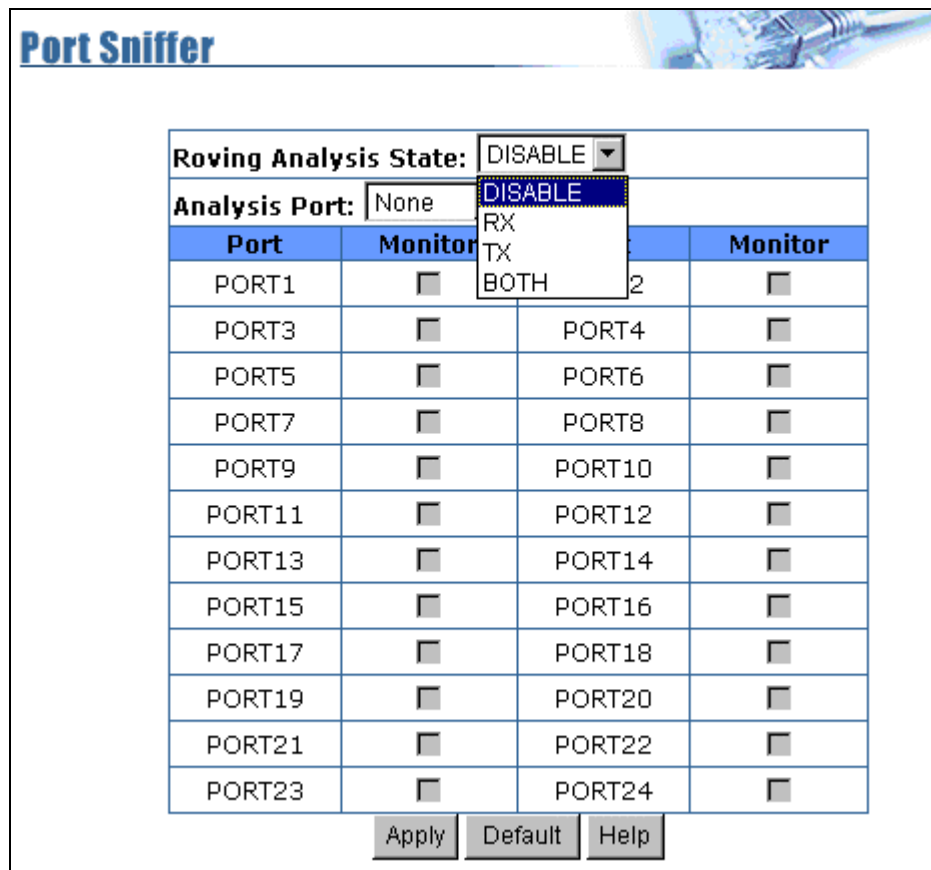

Port Sniffer

Roving Analysis State: **DISABLE**

Analysis Port: **None**

Port	Monitor	Port	Monitor
PORT1	<input type="checkbox"/>	PORT2	<input type="checkbox"/>
PORT3	<input type="checkbox"/>	PORT4	<input type="checkbox"/>
PORT5	<input type="checkbox"/>	PORT6	<input type="checkbox"/>
PORT7	<input type="checkbox"/>	PORT8	<input type="checkbox"/>
PORT9	<input type="checkbox"/>	PORT10	<input type="checkbox"/>
PORT11	<input type="checkbox"/>	PORT12	<input type="checkbox"/>
PORT13	<input type="checkbox"/>	PORT14	<input type="checkbox"/>
PORT15	<input type="checkbox"/>	PORT16	<input type="checkbox"/>
PORT17	<input type="checkbox"/>	PORT18	<input type="checkbox"/>
PORT19	<input type="checkbox"/>	PORT20	<input type="checkbox"/>
PORT21	<input type="checkbox"/>	PORT22	<input type="checkbox"/>
PORT23	<input type="checkbox"/>	PORT24	<input type="checkbox"/>

Apply Default Help

2-4-10. SNMP/Trap Manager

Any Network Management platform running the simple Network Management Protocol (SNMP) can


manage the switch, provided the Management Information Base (MIB) is installed correctly on the management station. The SNMP is a Protocol that governs the transfer of information between management station and agent.

1. **System Options** : Use this page to define management stations as trap managers and to enter SNMP community strings. User can also define a name, location, and contact person for the switch. Fill in the system options data, and then click Apply to update the changes on this page.

Name: Enter a name to be used for the switch.

Location: Enter the location of the switch.

Contact: Enter the name of a person or organization.

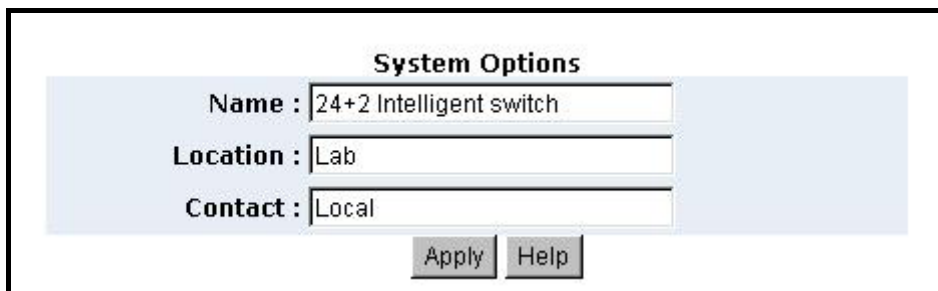


The screenshot shows a web interface titled "System Options". It contains three input fields: "Name" with the value "24+2 Intelligent switch", "Location" with the value "Lab", and "Contact" with the value "Local". Below these fields are two buttons: "Apply" and "Help".

2. **Community strings** serve as passwords and can be entered as one of the following:

RO: Read only. Enables requests accompanied by this string to display MIB-object information.

RW: Read write. Enables requests accompanied by this string to display MIB-object information and to set MIB objects.

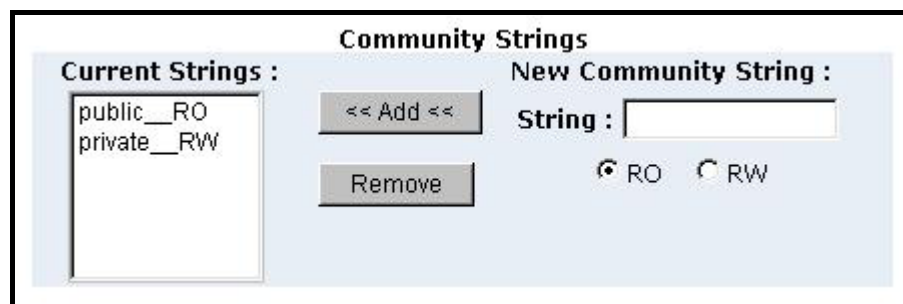

The screenshot shows a web interface titled "Community Strings". It is divided into two main sections. On the left, under "Current Strings :", there is a list box containing "public__RO" and "private__RW". To the right of this list are two buttons: "<< Add <<" and "Remove". On the right side, under "New Community String :", there is a "String :" input field. Below this field are two radio buttons: "RO" (which is selected) and "RW".

3. **Trap Manager** : A trap manager is a management station that receives traps, the system alerts generated by the switch. If no trap manager is defined, no traps are issued. Create a trap manager by entering the IP address of the station and a community string.

Trap Managers

Current Managers :

(none)

<< Add <<

Remove

New Manager :

IP Address :

Community :

2-4-11 Security Manager

On this page, user can change user name and password with following steps.

1. **User name:** Type the new user name.
2. **Password:** Type the new password.
3. **Reconfirm password:** Retype the new password.
4. **Click Apply.**



The screenshot displays the 'Security Manager' web interface. At the top, the title 'Security Manager' is shown in blue text next to a decorative image of a network cable. Below the title, there is a light blue rectangular form area. Inside this area, the following fields and controls are visible:


- User Name:** A text input field containing the value 'admin'.
- Assign/Change password:** A password input field containing three asterisks '***'.
- Reconfirm pssword:** A password input field containing three asterisks '***'.
- Apply:** A grey button located at the bottom right of the form area.

2-4-12 802.1x Configuration

System Configuration

802.1x makes use of the physical access characteristics of IEEE802 LAN infrastructures in order to provide a means of authenticating and authorizing devices attached to a LAN port that has point-to-point connection characteristics, and of preventing access to that port in cases in which the authentication and authorization process fails.

To enable 802.1x, from **Administrator \Switch setting \Advanced** then you still to fill in the authentication server information :

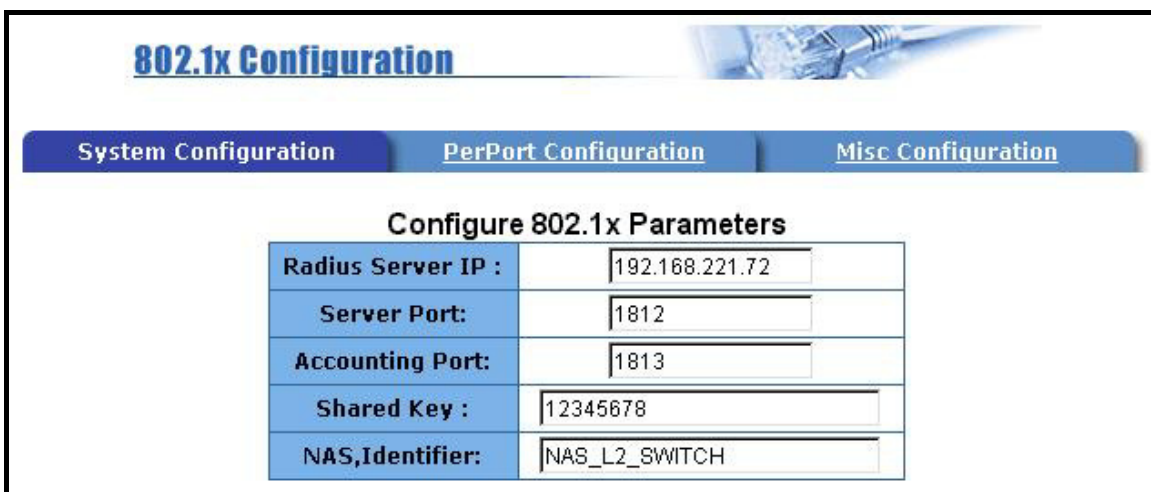

Configure 802.1x Parameters	
Radius Server IP :	192.168.221.72
Server Port:	1812
Accounting Port:	1813
Shared Key :	12345678
NAS,Identifier:	NAS_L2_SWITCH

Radius Server IP Address: the IP address of the authentication server.

Server Port: The UDP port number used by the authentication server to authenticate. **Accounting Port:** The UDP port number used by the authentication server to retrieve accounting information.

Shared Key: A key shared between this switch and authentication server.

NAS, Identifier: A string used to identify this switch.

Perport Configuration

In this page, you can select the specific port and configure the Authorization State.

Each port can select four kinds of Authorization State:

Configure 802.1x Per Port State	
Port Number	Port State
<div> <div>PORT2</div> <div>PORT4</div> <div>PORT5</div> </div>	<div>Au</div>
<div> <div>Apply</div> <div>Help</div> </div>	

Fu : Force the specific port to be unauthorized.

Fa : Force the specific port to be authorized.

Au : The state of the specific port was determined by the outcome of the authentication.

No : The specific port didn't support 802.1x function.

Misc Configuration

In this page, you can change the default configuration for the 802.1x standard:

802.1x Configuration														
System Configuration	PerPort Configuration	Misc Configuration												
<div>Configure 802.1x misc configuration</div> <table border="1"> <tbody> <tr> <td>Quiet period:</td> <td>60</td> </tr> <tr> <td>Tx period:</td> <td>30</td> </tr> <tr> <td>Supplicant timeout:</td> <td>30</td> </tr> <tr> <td>Server timeout:</td> <td>30</td> </tr> <tr> <td>Max requests:</td> <td>2</td> </tr> <tr> <td>Reauth period:</td> <td>3600</td> </tr> </tbody> </table> <div> <div>Apply</div> </div>			Quiet period:	60	Tx period:	30	Supplicant timeout:	30	Server timeout:	30	Max requests:	2	Reauth period:	3600
Quiet period:	60													
Tx period:	30													
Supplicant timeout:	30													
Server timeout:	30													
Max requests:	2													
Reauth period:	3600													

Quiet Period : Used to define periods of time during which it will not attempt to acquire a supplicant(Default time is 60 seconds).

Tx Period : Used to determine when an EAPOL PDU is to be transmitted (Default value is 30 seconds).

Supplicant Timeout: Used to determine timeout conditions in the exchanges between the supplicant and authentication server(Default value is 30 seconds).

Server Timeout : Used to determine timeout conditions in the exchanges between the authenticator and authentication server(Default value is 30 seconds).

ReAuthMax : Used to determine the number of reauthentication attempts that are permitted before the specific port becomes unauthorized(Default value is 2 times).

Reauth Period : used to determine a nonzero number of seconds between periodic reauthentication of the supplications(Default value is 3600 seconds).

2-5. TFTP Update Firmware

1. The following menu options provide some system control functions to allow a user to update firmware and remote boot switch system:

- * Install TFTP program(such as Turbo98, or Cisco TFTP) and then execute.
- * Copy updated firmware **image.bin** into TFTP server's directory.
- * In web management select administrator—TFTP update firmware.
- * Download new **image.bin** file by pressing <update firmware>.
- * After update finished, press <reboot> to restart switch.



TFTP Download New Image

TFTP Server IP Address	192.168.223.99
Firmware File Name	image.bin

Apply Help



Image download complete.
Would you make sure to update firmware?

Update Firmware




Reboot Switch System

reboot Help

2-6. Configuration Backup

2-6-1. TFTP Restore Configuration

Use this page to set ftp server address. You can restore EEPROM value from here, but you must put back image in ftp server, switch will download back flash image.



The screenshot shows the 'TFTP Configuration' web interface. At the top, there are two tabs: 'TFTP Restore Configuration' (which is selected and highlighted in blue) and 'TFTP Backup Configuration'. Below the tabs, there are two input fields: 'TFTP Server IP Address' with the value '192.168.223.99' and 'Backup File Name' with the value 'flash.dat'. At the bottom, there are two buttons: 'Apply' and 'Help'.

TFTP Configuration	
TFTP Restore Configuration TFTP Backup Configuration	
TFTP Server IP Address	192.168.223.99
Backup File Name	flash.dat
<input type="button" value="Apply"/> <input type="button" value="Help"/>	

2-6-2. TFTP Backup Configuration

Use this page to set tftp server ip address. You can save current EEPROM value from here, then go to the TFTP restore configuration page to restore the eeprom value.




The screenshot shows the 'TFTP Configuration' web interface. At the top, there are two tabs: 'TFTP Restore Configuration' and 'TFTP Backup Configuration' (which is selected and highlighted in blue). Below the tabs, there are two input fields: 'TFTP Server IP Address' with the value '192.168.223.99' and 'Backup File Name' with the value 'flash.dat'. At the bottom, there are two buttons: 'Apply' and 'Help'.

TFTP Configuration	
TFTP Restore Configuration TFTP Backup Configuration	
TFTP Server IP Address	192.168.223.99
Backup File Name	flash.dat
<input type="button" value="Apply"/> <input type="button" value="Help"/>	


2-7. Reset System

Reset Switch to default configuration, default value as below

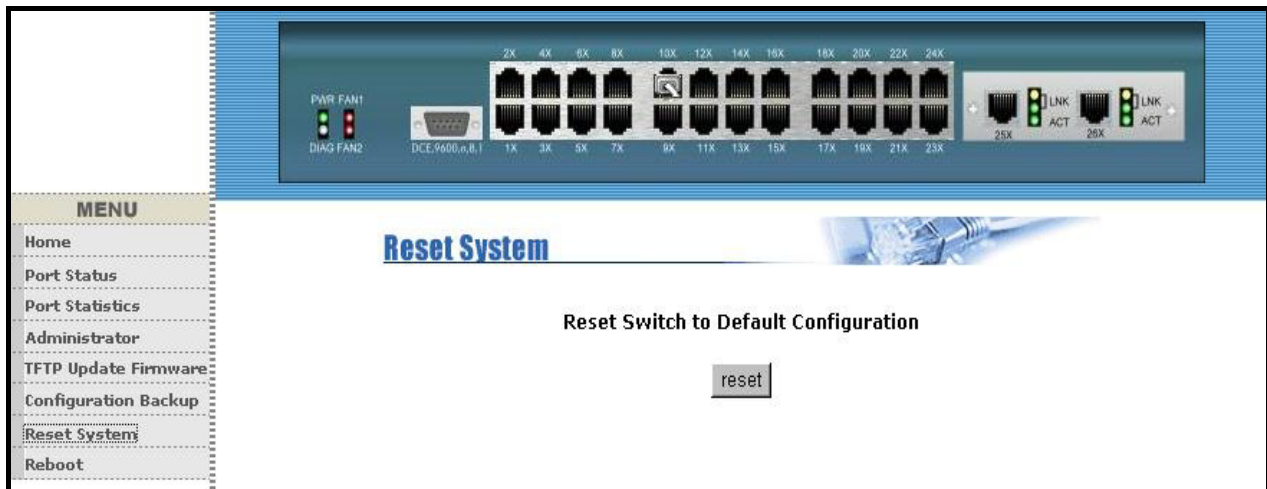

2-8. Reboot

Reboot the Switch in software reset.

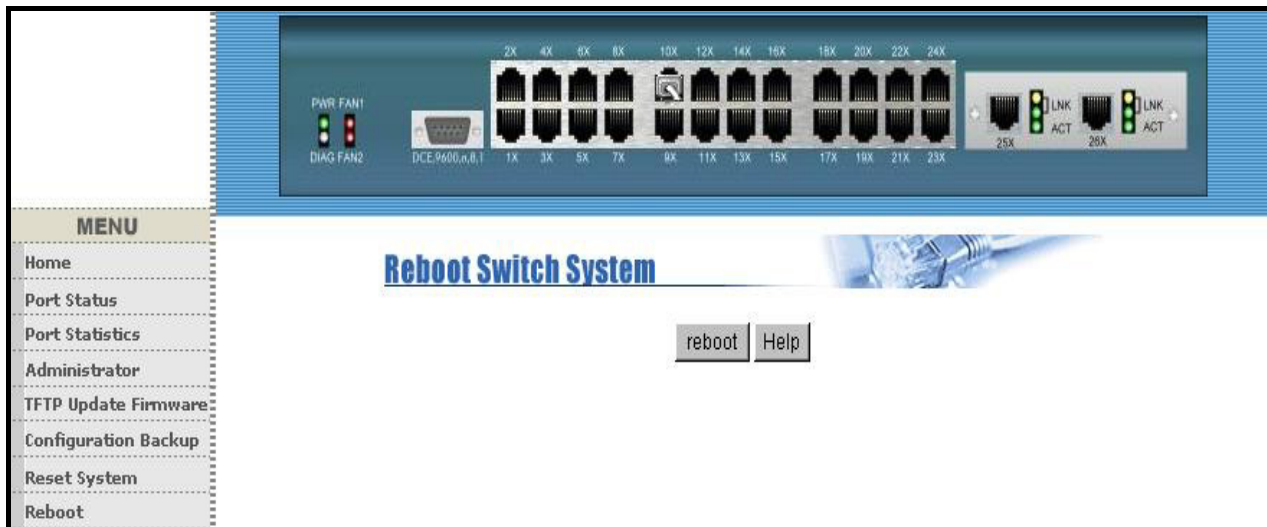

3. Console -- 1K Xmodem update firmware


We provide the 1k X modem to update firmware on console. 1K X modem only works in 57600bps mode. So you must change baudrate to 57600bps to download firmware.

There are 2 cases to use 1k X modem to update firmware:


- a. User enters "1K X modem receiver mode" through pressing any key within 5 seconds after system power on.
- b. System automatically enter "1K X modem receiver mode" if it detects the firmware checksum fail while booting.

1. Press disconnect button when you start 1K X modem modes.


Press **File -> Properties**, change baudrate to 57600bps, then press **OK**.

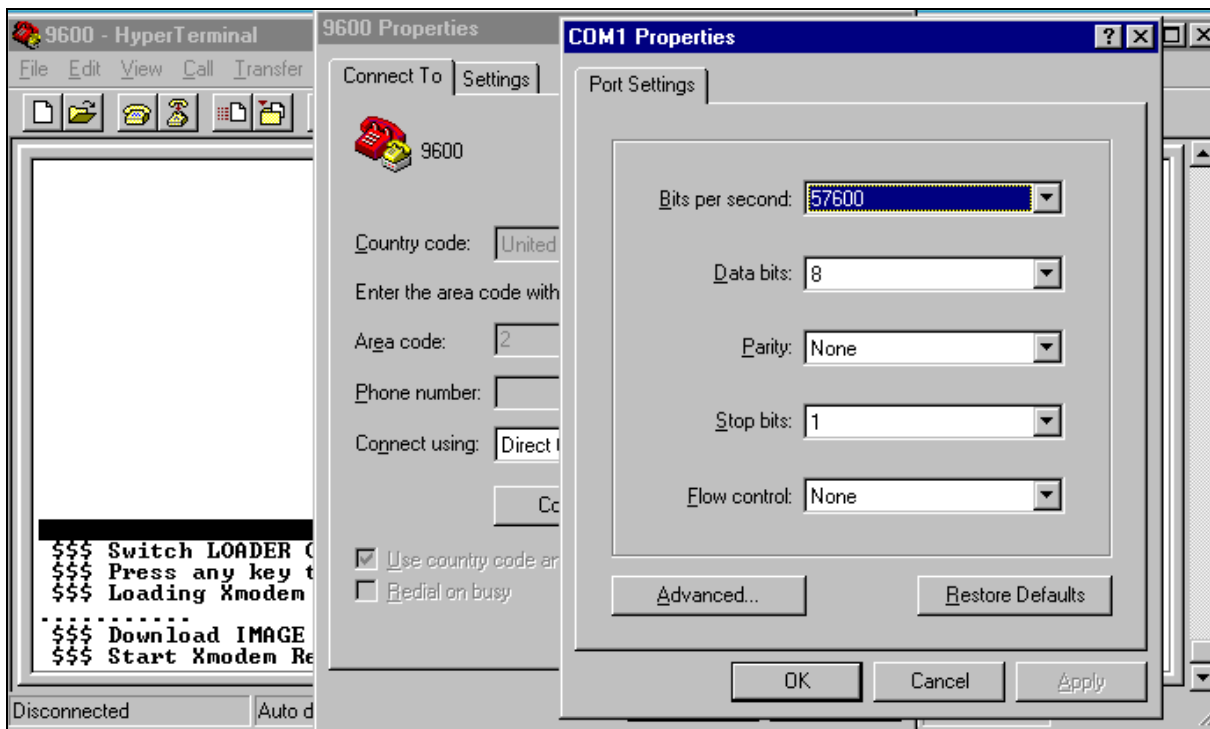


2. Press connected, you will see “CCCC...”displayed on console.
Then select *Transfer Send File*.

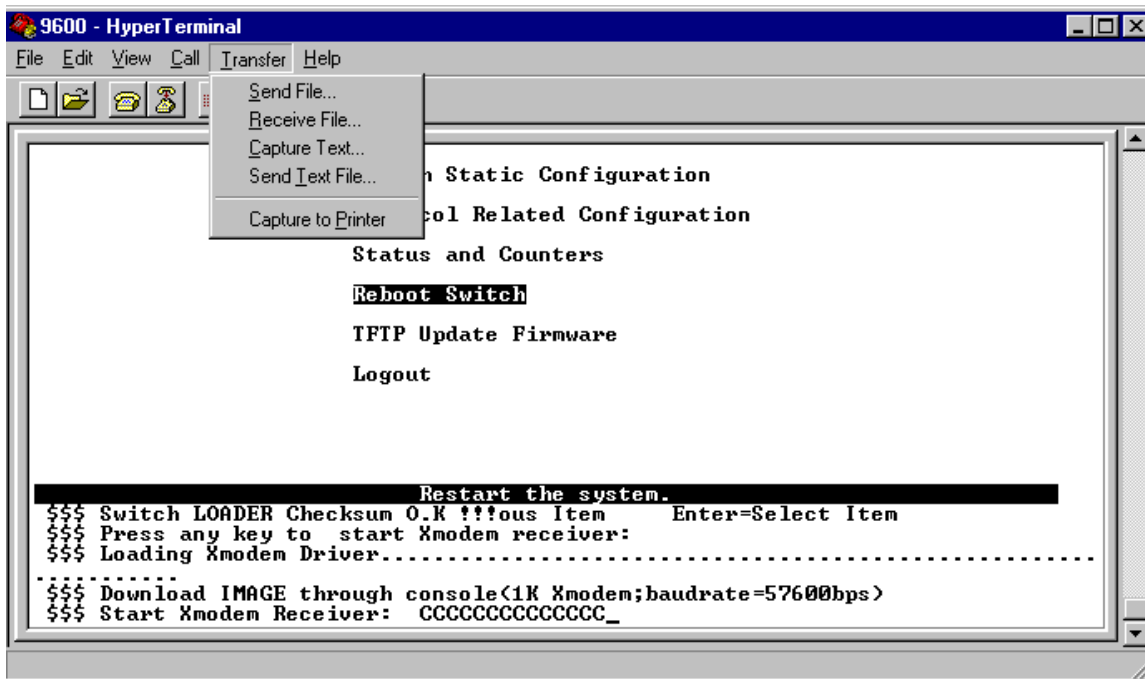

3. Select *1K Xmodem* in the *Protocol* item, and give the place that image file folder. Press *Send* button.

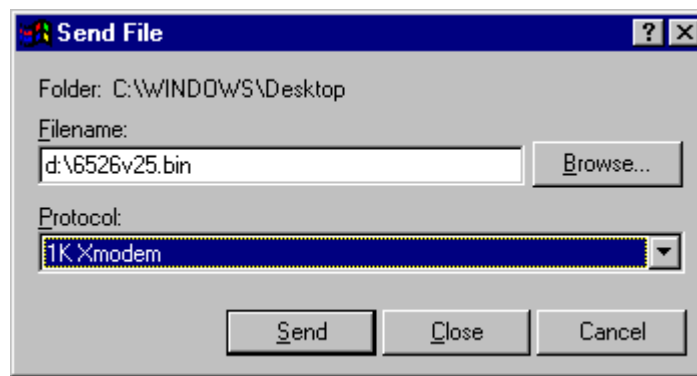


4. Start download image file.

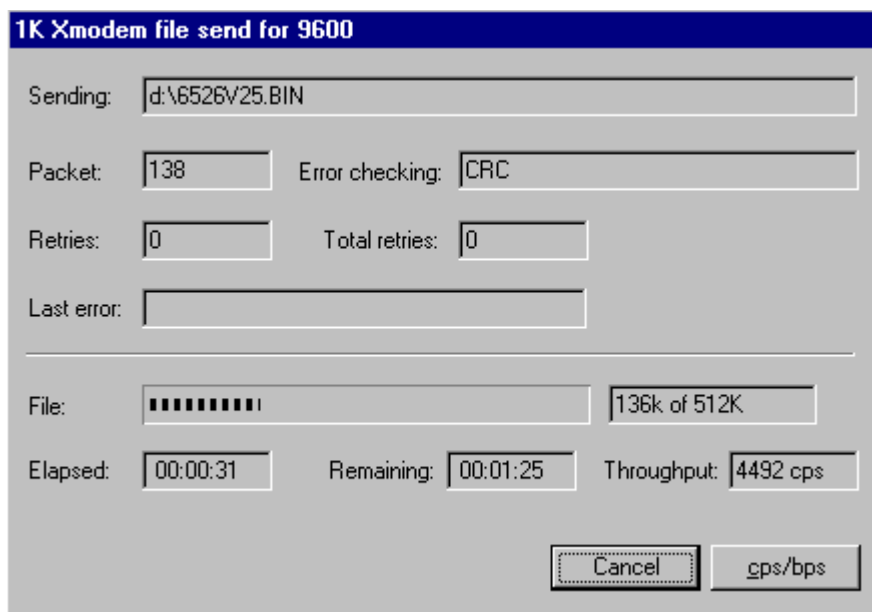

A Windows-style dialog box titled "1K Xmodem file send for 9600". It contains several input fields and buttons. The "Sending:" field contains "d:\6526V25.BIN". The "Packet:" field contains "138" and the "Error checking:" field contains "CRC". The "Retries:" field contains "0" and the "Total retries:" field contains "0". There is an empty "Last error:" field. Below these is a progress bar labeled "File:" showing a partially filled bar and a label "136k of 512K". At the bottom, there are three fields: "Elapsed:" with "00:00:31", "Remaining:" with "00:01:25", and "Throughput:" with "4492 cps". At the very bottom are two buttons: "Cancel" and "cps/bps".

5. Finish download image, the switch system will update firmware automatic. Update firmware ok, the switch will reboot. Please change the boudrate to 9600bps.

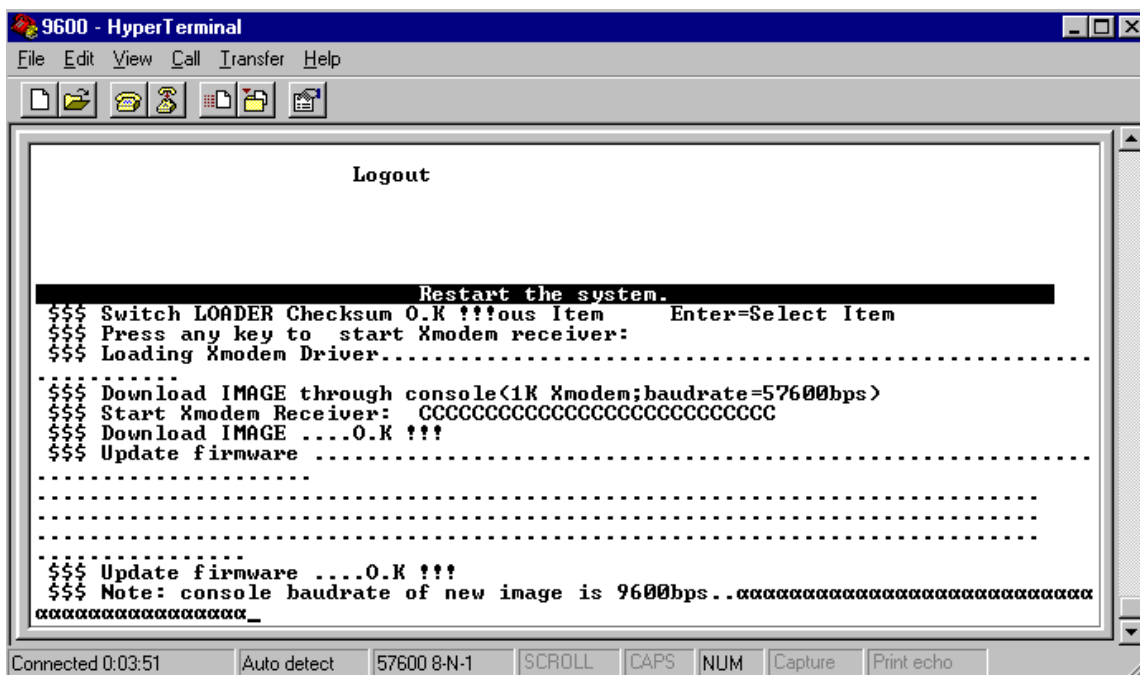

A HyperTerminal window titled "9600 - HyperTerminal" showing a text-based interface for a switch's firmware update. The window has a menu bar (File, Edit, View, Call, Transfer, Help) and a toolbar with icons for file operations. The main text area displays the following messages:

```
Logout

Restart the system.
$$$ Switch LOADER Checksum O.K !!!ous Item      Enter=Select Item
$$$ Press any key to start Xmodem receiver:
$$$ Loading Xmodem Driver.....
$$$ Download IMAGE through console(1K Xmodem;baudrate=57600bps)
$$$ Start Xmodem Receiver: CCCCCCCCCCCCCCCCCCCCCC
$$$ Download IMAGE ....O.K !!!
$$$ Update firmware .....
.....
.....
$$$ Update firmware ....O.K !!!
$$$ Note: console baudrate of new image is 9600bps..aaaaaaaaaaaaaaaaaaaaaaaaaaaa
aaaaaaaaaaaaaaaaaaaa_
```

The status bar at the bottom shows "Connected 0:03:51", "Auto detect", "57600 8-N-1", and buttons for "SCROLL", "CAPS", "NUM", "Capture", and "Print echo".

4. Out-of-band Terminal mode management

1. **24+2G switch** also provide a serial interface to manage and monitor the switch, user can follow the Console Port Information provide by web to use windows HyperTerminal program to link the switch.
2. You can type user name and password to login. The default user name is “**admin**”, the default password is “**123**”.

```
User Interface
Intelligent 24 + 2 Switch

username:
password:
```

4-1 Main Menu

There are six items for selected as follows:

```

Main Menu
=====

Switch Static Configuration
Protocol Related Configuration
Status and Counters
Reboot Switch
TFTP Update Firmware
Logout

Configure the switch.
Tab=Next Item      BackSpace=Previous Item      Enter=Select Item
```

Switch Static Configuration: Configure the switch.

Protocol Related Configuration: Configure the protocol function.

Status and Counters: Show the status of the switch.

Reboot Switch: Restart the system or reset switch to default configuration.

TFTP Update Firmware: Use TFTP to download image.

Logout: Exit the menu line program.

<Control Key>

The control key as follow are provided for this mode operation:

Tab: Move the vernier to next item.

Backspace: Move the vernier to previous item.

Enter: Select item.

Space: Toggle selected item to next configure.

4-2 Switch Static Configuration

```
Intelligent Switch : Switch Configuration
=====

Port Configuration
Trunk Configuration
VLAN Configuration
Misc Configuration
Administration Configuration
Port Mirroring Configuration
Priority Configuration
MAC Address Configuration
Main Menu

Display or change port configuration.
Tab=Next Item      BackSpace=Previous Item      Enter=Select Item
```

<Control Key>

You can press the key of **Tab** or **Backspace** to choose item, and press **Enter** key to select item. The action menu line as follow provided in later configure page.

Actions->

<Quit>: Exit the page of port configuration and return to previous menu.

<Edit>: Configure all items. Finished configure press

Ctrl+A: Back to action menu line.

<Save>: Save all configure value.

<Previous Page>: Return to previous page to configure.

<Next page>: Go to the next page to configure it.

4-2-1. Port Configuration

This page can change every port status.

Press **Space** key to change configures of per item.

Intelligent Switch : Port Configuration									
=====									
Port	Type	InRate (100K)	OutRate (100K)	Enable	Auto	Spd/Dpx		FlowControl	
								Full	Half
PORT1	100Tx	0	0	Yes	AUTO	100	Full	On	On
PORT2	100Tx	0	0	Yes	AUTO	100	Full	On	On
PORT3	100Tx	0	0	Yes	AUTO	100	Full	On	On
PORT4	100Tx	0	0	Yes	AUTO	100	Full	On	On
PORT5	100Tx	0	0	Yes	AUTO	100	Full	On	On
PORT6	100Tx	0	0	Yes	AUTO	100	Full	On	On
PORT7	100Tx	0	0	Yes	AUTO	100	Full	On	On
PORT8	100Tx	0	0	Yes	AUTO	100	Full	On	On
actions-> <Quit> <Edit> <Save> <Previous Page> <Next Page>									
Select the Action menu.									
Tab=Next Item BackSpace=Previous Item Quit=Previous menu Enter=Select Item									

1. InRate (100K/unit):

User can set input rate control, per unit is 100K. The valid range is 0~1000.

0: disable rate control.

1~1000: valid rate value.

2. OutRate (100K/unit):

User can set output rate control, per unit is 100K. The valid range is 0~1000.

0: disable rate control.

1~1000: valid rate value.

3. Enabled:

User can **disable** or **enable** this port control.

“**Yes**” that mean the port is enable.

“**No**” that mean the port is disable.

4. Auto:

User can set auto negotiation mode is “**Auto**”, “**Nway_Force**”, “**Force**” of per port.

5. Spd/Dpx:

User can set “**100Mbps**” or “**10Mbps**” speed on port 1~port 24,

set “**1000Mbps**”, “**100Mbps**” or “**10Mbps**” speed on port25~port26 (depend on module card mode),

and set “**full-duplex**” or “**half-duplex**” mode.

6. Flow Control:

Full: User can set full flow control function (**pause**) as enable or disable.

Half: User can set half flow control function (**backpressure**) as enable or disable.

NOTE:

1. Pressing <Save> only can save one page configuration.
2. If the static trunk groups exist, you can see it (ex: TRK1, TRK2...) after port 26, and you can configure all of the items as above.

4-2-2. Trunk Configuration

This page can create max seven trunk groups. User can arbitrarily select up to four ports from port 1~port 26 to build a trunking group.

Intelligent Switch : Trunk Configuration																											
=====																											
	01	02	03	04	05	06	07	08	09	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	M1	M2	
1	v	v	v	v	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
2	-	-	-	-	v	v	v	v	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
3	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
4	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
5	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
6	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
7	-	-	-	-	-	-	-	-	-	-	-	-	-	v	-	v	-	-	-	-	-	-	-	-	-	-	
TRK1	Static																										
TRK2	LACP																										
TRK3	Disable																										
TRK4	Disable																										
TRK5	Disable																										
TRK6	Disable																										
TRK7	Static																										
actions-> <Edit> <Save> <Quit>																											
Select the action menu.																											
Tab=Next Item BackSpace=Previous Item Quit=Previous menu Enter=Select Item																											

Actions->

1. Select **<Edit>** on actions menu
2. Press **space** key to configure the member port of trunk group. Besides, you have to set “Static” or “LACP” for the corresponding trunk group of TRK1~TRK7 item.
“Static” – the normal trunk.
“LACP” – this trunk group have link aggregation control protocol.
3. Press **Ctrl+A** to go back action menu line
4. Select **<Save>** to save all configure value.
5. If the item of TRK1~TRK7 is set “Disable”, it’s mean the trunk group is deleted.
6. All ports in the same static trunk group will be treated as single port. So when you setting VLAN members and Port configuration they will be toggled on or off simultaneously.

NOTE: If VLAN group exist, all of the members of static trunk group **must** be in same VLAN group.

4-2-3. VLAN Configuration

```
Intelligent Switch : VLAN Configuration
=====

VLAN Configure

Create a VLAN Group

Edit/Delete a VLAN Group

Group Sorted Mode

Previous Menu

Configure the VLAN pvid and ingress,egress Rule.
Tab=Next Item BackSpace=Previous Item Quit=Previous menu Enter=Select Item
```

4-2-3-1. VLAN Configure

This page can set VLAN mode to port-based VLAN or 802.1Q VLAN or disable VLAN function.

```
Intelligent Switch : VLAN Support Configuraton
=====

VLAN Mode :PortBased

actions->    <Quit>    <Edit>    <Save>    <Previous Page>    <Next Page>
Select the Action menu.
Tab=Next Item BackSpace=Previous Item Space=Toggle Ctrl+A=Action menu
```

NOTE: Change the VLAN mode for every time, user have to restart the switch for valid value.

If set 802.1Q VLAN, you can set PVID, ingress filtering 1 and ingress filtering 2 in this page too.

```

Intelligent Switch : VLAN Support Configuraton
=====

VLAN Mode :802.1Q

Port          PVID          IngressFilter1      IngressFilter2
-----
PORT1         1          Forward             Drop
PORT2         3          Forward             Forward
PORT3         1          Drop                Forward
PORT4         1          Drop                Forward
PORT5         1          Drop                Forward
PORT6         1          Drop                Forward
PORT7         1          Drop                Forward
PORT8         1          Drop                Forward

actions->      <Quit>      <Edit>      <Save>      <Previous Page>      <Next Page>
Select the Action menu.
Tab=Next Item  BackSpace=Previous Item  Quit=Previous menu  Enter=Select Item

```

- 1. PVID (Port VID: 1~255):** Type the PVID.

It matches that Ingress Filtering Rule 1 on web.

Press **Space** key to choose “forward” or “drop” the frame that VID not matching this port’s configured VID.

It matches that Ingress Filtering Rule 2 on web.

Press **Space** key to choose “drop” or “forward” the untagged frame.

4-2-3-2. Create a VLAN Group

◆ Create Port-Based VLAN

Create a port-based VLAN and add member/nonmember ports to it.

1. Select <Edit>.
6. **VLAN Name:** Type a name for the new VLAN.
8. **Grp ID:** Type the VLAN group ID. The group ID rang is 1~4094.
9. **Member:** Press <Space> key to choose VLAN member. There are two types to selected:
 - a. **Member** : the port is member port.
 - b. **No** : the port is NOT member port.
10. Press **Ctrl+A** go back action menu line.
11. Select <Save> to save all configure value.

Add an VLAN Group

VLAN Name: [vlan2] Grp ID: [2] (1~4094)

Port	Member

PORT1	Member
PORT2	Member
PORT3	No
PORT4	Member
PORT5	No
PORT6	No
PORT7	No
PORT8	No

actions-> <Quit> <Edit> **<Save>** <Previous Page> <Next Page>

Select the Action menu.

Tab=Next Item BackSpace=Previous Item Quit=Previous menu Enter=Select Item

NOTE: If the trunk groups exist, you can see it (ex: TRK1, TRK2...) after port26, and you can configure it is the member of the VLAN or not.

◆ Create 802.1Q VLAN

Create an 802.1Q VLAN and add tagged /untagged member ports to it.

1. Select **<Edit>**.
2. **VLAN Name:** Type a name for the new VLAN.
3. **VLAN ID:** Type a VID (between 1~4094). The default is 1. There are 256 VLAN groups to provided configure.
4. **Protocol VLAN:** Press **Space** key to choose protocols type.
5. **Member:** Press **Space** key to choose VLAN member. There are three types to selected:
 - a. **UnTagged** : this port is the member port of this VLAN group and outgoing frames are NO VLAN-Tagged frames.
 - b. **Tagged** : this port is the member port of this VLAN group and outgoing frames are VLAN-Tagged frames.
 - c. **NO** : The port is NOT member of this VLAN group.
6. Press **Ctrl+A** go back action menu line.
7. Select **<Save>** to save all configure value.

Add an VLAN Group

VLAN Name: [vlan2] VLAN ID: [2] (1~4094)

Protocol VLAN : None

Port	Member
PORT1	UnTagged
PORT2	Tagged
PORT3	UnTagged
PORT4	No
PORT5	No
PORT6	No
PORT7	No
PORT8	No

actions-> <Quit> <Edit> **<Save>** <Previous Page> <Next Page>

Select the Action menu.

Tab=Next Item BackSpace=Previous Item Quit=Previous menu Enter=Select Item

NOTE: If the trunk groups exist, you can see it (ex: TRK1, TRK2...) after port 26, and you can configure it is the member of the VLAN or not.

4-2-3-3. Edit / Delete a VLAN Group

In this page, user can edit or delete a VLAN group.

1. Press <Edit> or <Delete> item.
2. Choose the VLAN group that you want to edit or delete and then press enter.
3. User can modify the protocol VLAN item and the member ports are tagged or un-tagged and remove some member ports from this VLAN group.
4. After edit VLAN, press <Save> key to save all configures value.

NAME:	VID:	NAME:	VID:
-----	-----	-----	-----
DEFAULT	1		
vlan2	2		

actions-> <Quit> <Edit> <Delete> <Previous Page> <Next Page>
Edit/Delete a VLAN Group.
Tab=Next Item BackSpace=Previous Item CTRL+A=Action menu Enter=Select Item

----- Edit an VLAN Group -----

VLAN Name: [vlan2] VLAN ID: [2] (1~4094)

Protocol VLAN : AppleTalk/NetBIOS

Port	Member
-----	-----
PORT1	UnTagged
PORT2	Tagged
PORT3	UnTagged
PORT4	No
PORT5	No
PORT6	No
PORT7	No
PORT8	No

actions-> <Quit> <Edit> <Save> <Previous Page> <Next Page>
Select the Action menu.
Tab=Next Item BackSpace=Previous Item Quit=Previous menu Enter=Select Item

NOTE :

1. When pressing <Enter> once will complete deletion on delete mode.
2. The VLAN Name and VLAN ID cannot modify.
3. The default VLAN can't be deleting.

4-2-3-4. Groups Sorted Mode

In this page, user can select VLAN groups sorted mode:

- (1) sorted by name
- (2) sorted by VID.

The *Edit/Delete a VLAN group* page will display the result.

```
Intelligent Switch : Group Sorted Selection
=====

Group Sorted :Sorted_By_Name

actions->      <Edit>      <Save>      <Quit>
Select the action menu.
Tab=Next Item BackSpace=Previous Item Quit=Previous menu Enter=Select Item
```

In the *Edit/Delete a VLAN Group* page, the result of **sorted by name**.

```
NAME:          VID:          NAME:          VID:
-----
DEFAULT        1
A1             56
E1             33
vlan2          2

actions->      <Quit>      <Edit>      <Delete>      <Previous Page>      <Next Page>
Edit/Delete a VLAN Group.
Tab=Next Item BackSpace=Previous Item Quit=Previous menu Enter=Select Item
```

In the *Edit/Delete a VLAN Group* page, the result of **sorted by VID**.

NAME:	VID:	NAME:	VID:
-----	-----	-----	-----
DEFAULT	1		
vlan2	2		
B1	33		
A1	56		

actions->
<Quit>
<Edit>
<Delete>
<Previous Page>
<Next Page>

Edit/Delete a VLAN Group.

Tab=Next Item BackSpace=Previous Item Quit=Previous menu Enter=Select Item

4-2-4. Misc Configuration

Intelligent Switch : Misc Configuration
=====
MAC Age Interval
Broadcast Storm Filtering
Max bridge transmit delay bound
Port Security
Previous Menu
Configure the MAC aging time.
Tab=Next Item BackSpace=Previous Item Enter=Select Item

4-2-4-1. MAC Age Interval

Type the number of seconds that an inactive MAC address remains in the switch's address table. The valid range is 300~765 seconds. Default is **300** seconds.

```
Intelligent Switch : MAC Aging Time
=====

MAC Age Interval (sec) [600] : 600
(disable:0,valid value:300~765)

actions->      <Edit>      <Save>      <Quit>
                Select the action menu.
Tab=Next Item  BackSpace=Previous Item  Quit=Previous menu Enter=Select Item
```

4-2-4-2. Broadcast Storm Filtering

This page is configuring broadcast storm control.

1. Press **<Edit>** to configure the broadcast storm filter mode.
2. Press **Space** key to choose the threshold value.

The valid threshold value is 5%, 10%, 15%, 20%, 25% and NO. Default is **5%**.

```
Intelligent Switch : Broadcast Storm Filter Mode
=====

Broadcast Storm Filter Mode :5

actions->      <Edit>      <Save>      <Quit>
                Select the action menu.
Tab=Next Item  BackSpace=Previous Item  Quit=Previous menu Enter=Select Item
```


4-2-4-3. Max bridge transmit delay bound

1. **Max bridge transmit delay bound:** Limit the packets queuing time in switch. If enabled, the packets queued exceed will be drop. Press **Space** key to set the time. Those valid values are 1sec, 2sec, 4sec and off. Default is **off**.
2. **Low Queue Delay Bound:** Limit the low priority packets queuing time in switch. If enabled, the low priority packet stays in switch exceed Low Queue Max Delay Time, it will be sent. Press **Space** key to enable or disable this function. Default is **disable**.
3. **Low Queue Max Delay Time:** To set the time that low priority packets queuing in switch. The valid range is 1~255ms. Default Max Delay Time is **255ms**.

```
Intelligent Switch : Max Bridge Transmit Delay Bound
=====

Max bridge transmit delay bound :OFF
Low Queue Delay Bound :Disabled
Low Queue Max Delay Time :255

actions->      <Edit>          <Save>          <Quit>
Select the action menu.
Tab=Next Item BackSpace=Previous Item Quit=Previous menu Enter=Select Item
```

NOTE: Make sure “Max bridge transit delay bound control” is enabled before enabling Low Queue Delay Bound, because Low Queue Delay Bound must be work under “Max bridge transit delay bound control” is enabled situation.

4-2-4-4. Port Security

A port in security mode will be “locked” without permission of address learning. Only the incoming packets with SMAC already existing in the address table can be forwarded normally. User can disable the port from learning any new MAC addresses, then use the static MAC addresses screen to define a list of MAC addresses that can use the secure port.

```
Intelligent Switch : Port Security
=====

Port          Enable Security
              (disable for MAC Learning)
-----
PORT1         enabled
PORT2         enabled
PORT3         enabled
PORT4         Disabled
PORT5         Disabled
PORT6         Disabled
PORT7         Disabled
PORT8         Disabled

actions->      <Quit>      <Edit>      <Save>      <Previous Page>      <Next Page>
Select the Action menu.
Tab=Next Item  BackSpace=Previous Item  Quit=Previous menu  Enter=Select Item
```

Actions->

1. Select **<Edit>**.
2. Press **Space** key to choose enable / disable item.
3. Press **Ctrl+A** to go back action menu line.
4. Select **<Save>** to save all configure value.
5. You can press **<Next Page>** to configure port9 ~ port26, press **<Previous Page>** return to last page.

4-2-4-4. Collision s Retry Forever

Collisions Retry Forever: **Disable** – In half duplex, if happen collision will retry 48 times and then drop frame.

Enable – In half duplex, if happen collision will retry forever (Default).

Intelligent Switch : Collisions Retry Forever
=====

Collisions Retry Forever : Enable

actions-> <Edit> <Save> <Quit>

Select the action menu.

Tab=Next Item BackSpace=Previous Item Quit=Previous menu Enter=Select Item

4-2-5. Administration Configuration

Intelligent Switch : Device Configuration
=====

Change Username

Change Password

Device Information

IP Configuration

Previous Menu

Configure the username.

Tab=Next Item BackSpace=Previous Item Enter=Select Item

4-2-5-1. Change Username

Use this page; user can change web management user name.

Type the new user name, and then press <Save> item.

Intelligent Switch : UserName Configuration
=====

UserName : admin

actions->

<Edit>

<Save>

<Quit>

Select the action menu.

Tab=Next Item BackSpace=Previous Item Quit=Previous menu Enter=Select Item

4-2-5-2. Change Password

Use this page; user can change web management login password.

Intelligent Switch : Password Configuration
=====

Old Password:***

new password:***

enter again :***

Entering new password.

Esc=Previous menu

4-2-5-3. Device Information

This page is provided to the user to configure the device information.

Intelligent Switch : Device Information

=====

Name : Intelligent 24+2 Switch

Description : Intelligent 24+2 Switch

Location : LAB

Content : 24 + 2 PORTS

actions->

<Edit>

<Save>

<Quit>

Select the action menu.

Tab=Next Item BackSpace=Previous Item Quit=Previous menu Enter=Select Item

4-2-5-4. IP Configuration

User can configure the IP setting and fill in the new value.

Intelligent Switch : IP Configuration

=====

DHCP : Disabled

IP Address : 192.168.223.38

Subnet Mask : 255.255.248.0

Gateway : 192.168.223.254

actions->

<Edit>

<Save>

<Quit>

Select the action menu.

Tab=Next Item BackSpace=Previous Item Quit=Previous menu Enter=Select Item

4-2-6. Port Mirroring Configuration

The port mirroring is a method for monitor traffic in switched networks. Traffic through ports can be monitored by one specific port. That is traffic goes in or out monitored ports will be duplicated into monitoring port.

Actions->

Press **Space** key to change configure of per item.

1. Select **<Edit>**.
2. **Sniffer Mode:** Press **Space** key to set sniffer mode Disable、Rx、Tx or Both.
3. **Monitoring Port:** It means sniffer port can be used to see all monitors port traffic. Press **Space** key to choose it.
4. **Monitored Port:** The ports you want to monitor. All monitor port traffic will be copied to sniffer port. You can select max 25 monitor ports in the switch. User can choose which port to monitor in only one sniffer mode. Press **Space** key to choose member port, “V” – is the member, “—” – not the member.
5. Press **Ctrl+A** go back action menu line
6. Select **<Save>** to save all configure value.
7. On the action menu line you can press **<Next Page>** to configure port9 ~ port26, press **<Previous Page>** return to last page.

```
Intelligent Switch : Port Sniffer
=====

Sniffer Mode:  Rx
Monitoring Port : PORT1
Monitored Port :

Port          member
-----
PORT1         -
PORT2         v
PORT3         -
PORT4         v
PORT5         -
PORT6         -
PORT7         v
PORT8         -

actions->      <Quit>      <Edit>      <Save>      <Previous Page>      <Next Page>
                Select the Action menu.
Tab=Next Item  BackSpace=Previous Item  Quit=Previous menu  Enter=Select Item
```

NOTE: Only has one sniffer mode in switch at the same time.

4-2-7. Priority Configuration

```
Intelligent Switch : The Priority configuration
=====

Port Static Priority

802.1p priority

Previous Menu

Configure port static priority.
Tab=Next Item      BackSpace=Previous Item      Enter=Select Item
```

4-2-7-1. Port Static Priority

This static priority based on port, if you set the port is high priority, income frame from this port always high priority frame.

```
Intelligent Switch : Port Priority
=====

Port          Priority
-----
PORT1         Low
PORT2         High
PORT3         Low
PORT4         High
PORT5         High
PORT6         Low
PORT7         High
PORT8         Low

actions->      <Quit>      <Edit>      <Save>      <Previous Page>      <Next Page>
Select the Action menu.
Tab=Next Item  BackSpace=Previous Item  Quit=Previous menu  Enter=Select Item
```


4-2-7-2. 802.1p Priority Configuration

There are 0~7-priority level can map to high or low queue.

Actions->

1. Select <Edit>.
2. Press **Space** key to select the priority level mapping to high or low queue.
3. **High/Low Queue Service Ration H : L:** User can select the ratio of high priority packets and low priority packets.
4. Press **Ctrl+A** go back action menu line.
5. Select <Save> to save all configure value.

```
Intelligent Switch : 802.1p Priority Configuration
=====
Will be overwritten by port-priority!!

Priority 0    : Low
Priority 1    : Low
Priority 2    : Low
Priority 3    : Low
Priority 4    : High
Priority 5    : High
Priority 6    : High
Priority 7    : High

QosMode : High/Low Queue Service Ratio
=>  H:[2] L:[1]

actions->      <Edit>          <Save>          <Quit>
Select the action menu.
Tab=Next Item BackSpace=Previous Item Quit=Previous menu Enter=Select Item
```

4-2-8. MAC Address Configuration

```
Intelligent Switch : MAC Address Configuration
=====

Static MAC Address

Filtering MAC Address

Previous Menu

Configure the MAC address.
Tab=Next Item      BackSpace=Previous Item      Enter=Select Item
```

4-2-8-1. Static MAC Address

When you add a static MAC address, it remains in the switch's address table, regardless of whether the device is physically connected to the switch. This saves the switch from having to re-learn a device's MAC address when the disconnected or powered-off device is active on the network again.

In this page user can add / modify / delete a static MAC address.

```
Intelligent Switch : Static MAC Address Configuration
=====

Mac Address      Port num  Vlan ID      Mac Address      Port num  Vlan ID
-----

actions-> <Quit> <Add> <Edit> <Delete> <Previous Page> <Next Page>
Add/Edit/Delete a Mac.
Tab=Next Item  BackSpace=Previous Item  Quit=Previous menu  Enter=Select Item
```

●Add static MAC address

Actions->

1. Press <Add> --> <Edit> key to add static MAC address.
2. **MAC Address:** Enter the MAC address to and from which the port should permanently forward traffic, regardless of the device's network activity.
3. **Port num:** press <Space> key to select the port number.
4. **Vlan ID:** If tag-based (802.1Q) VLAN are set up on the switch, static addresses are associated with individual VLANs. Type the VID to associate with the MAC address.
5. Press **Ctrl+A** to go back action menu line.
6. Then select <Save> to save all configure value.

```
Intelligent Switch : Add Static MAC Address
=====

Mac Address :0090CC26BBAA

Port num    :PORT3

Vlan ID     :2

actions->    <Edit>          <Save>          <Quit>
              Select the action menu.
Tab=Next Item BackSpace=Previous Item Quit=Previous menu Enter=Select Item
```

●Edit static MAC address

Actions->

1. Press <Edit> key.
2. Choose the MAC address that you want to modify and then press enter.

```
Intelligent Switch : Static MAC Address Configuration
=====

Mac Address   Port num  Vlan ID   Mac Address   Port num  Vlan ID
-----
0090CC26BBAA  PORT3     2
005000100001  PORT10    4

actions->  <Quit>  <Add>  <Edit>  <Delete>  <Previous Page>  <Next Page>
Add/Edit/Delete a Mac.
Tab=Next Item  BackSpace=Previous Item  Space=Toggle  Ctrl+A=Action menu
```

3. Press <Edit> key to modify all the items.
4. Press **Ctrl +A** to go back action menu line, and then select <Save> to save all configure value.

```
Intelligent Switch : Static MAC Address Configuration
=====

Mac Address : 0090CC26BBAA
Port num    : PORT3
Vlan ID     : 2

actions->      <Edit>      <Save>      <Quit>
Select the action menu.
Tab=Next Item  BackSpace=Previous Item  Space=Toggle  Ctrl+A=Action menu
```

●Delete static MAC address

Actions->

1. Press <Delete> key.
2. Choose the MAC address that you want to delete and then press enter.

```

Intelligent Switch : Static MAC Address Configuration
=====

Mac Address      Port num  Vlan ID      Mac Address      Port num  Vlan ID
-----
0090CC26BBAA    PORT3     2
005000100001    PORT10    4

actions->  <Quit>  <Add>  <Edit>  <Delete>  <Previous Page>  <Next Page>
Add/Edit/Delete a Mac.
Tab=Next Item  BackSpace=Previous Item  Quit=Previous menu  Enter=Select Item

```

4-2-8-2. Filtering MAC Address

MAC address filtering allows the switch to drop unwanted traffic. Traffic is filtered based on the destination addresses.

In this page user can add /modify /delete filter MAC address.

```
Intelligent Switch : Filter MAC Address Configuration
=====

Mac Address      Vlan ID      Mac Address      Vlan ID
-----

actions->  <Quit>  <Add>  <Edit>  <Delete>  <Previous Page>  <Next Page>
Add/Edit/Delete a Mac.
Tab=Next Item BackSpace=Previous Item Quit=Previous menu Enter=Select Item
```

● Add filter MAC address

Actions->

1. Press **<Add>** --> **<Edit>** key to add a filter MAC address.
2. **MAC Address:** Type the MAC address to filter.
3. **Vlan ID:** If tag-based (802.1Q) VLAN are set up on the switch, type the VID to associate with the MAC address.
4. Press **Ctrl+A** to go back action menu line, and then select **<Save>** to save all configure value.

```
Intelligent Switch : Add Filter MAC Address
=====

Mac Address :000000001A01
Vlan ID      :2

actions->  <Edit>  <Save>  <Quit>
Save successfully!press any key to return!
Tab=Next Item BackSpace=Previous Item Quit=Previous menu Enter=Select Item
```

● Edit filter MAC address

Actions->

1. Press <Edit> key.
2. Choose the MAC address that you want to modify and then press enter.

```
Intelligent Switch : Filter MAC Address Configuration
=====

Mac Address      Vlan ID      Mac Address      Vlan ID
-----
00000000000001  1
00000000000002  2
00000000000003  3

actions->  <Quit>  <Add>  <Edit>  <Delete>  <Previous Page>  <Next Page>
          Add/Edit/Delete a Mac.
Tab=Next Item  BackSpace=Previous Item  Space=Toggle  Ctrl+A=Action menu
```

3. Press <Edit> key to modify all the items.
4. Press **Ctrl+A** to go back action menu line, and then select <Save> to save all configure value.

```
Intelligent Switch : Edit Filter MAC Address
=====

Mac Address :00000000000001

Vlan ID      :1

actions->          <Edit>          <Save>          <Quit>
          Can not modify for Read Only item.
Tab=Next Item  BackSpace=Previous Item  Space=Toggle  Ctrl+A=Action menu
```

●Delete filter MAC address

Actions->

1. Press **<Delete>** key to delete a filter MAC address.
2. Choose the MAC address that you want to delete and then press enter.
3. When pressing **<Enter>** once will complete deletion on delete mode.

```
Intelligent Switch : Filter MAC Address Configuration
=====

Mac Address      Vlan ID          Mac Address      Vlan ID
-----
0000000000001    1
0000000000002    2
0000000000003    3

actions->  <Quit>  <Add>  <Edit>  <Delete>  <Previous Page>  <Next Page>
Add/Edit/Delete a Mac.
Tab=Next Item  BackSpace=Previous Item  Quit=Previous menu  Enter=Select Item
```


4-3. Protocol Related Configuration

```
Intelligent Switch : The Protocol Related configuration
=====

    STP

    SNMP

    GVRP

    IGMP

    DHCP

    LACP

    802.1X

    Previous Menu

Configure the Spanning Tree Protocol.
Tab=Next Item      BackSpace=Previous Item      Enter=Select Item
```

4-3-1. STP

The Spanning-Tree Protocol (STP) is a standardized method (IEEE 802.1D) for avoiding loops in switched networks. When STP enabled, to ensure that only one path at a time is active between any two nodes on the network.

```
Intelligent Switch : Spanning Tree Protocol
=====

    STP Enable

    System Configuration

    Perport Configuration

    Previous Menu

Enabled or disabled the Spanning Tree Protocol.
Tab=Next Item      BackSpace=Previous Item      Enter=Select Item
```

4-3-1-1. STP Enable

This page is show the users how to enable or disable Spanning Tree function. Press **Space** key to select enable or disable.

```
Intelligent Switch : STP Enabled/Disabled Configuration
=====

STP :Enabled

actions->      <Edit>      <Save>      <Quit>
Select the action menu.
Tab=Next Item BackSpace=Previous Item Quit=Previous menu Enter=Select Item
```

4-3-1-2. STP System Configuration

Intelligent Switch : STP System Configuration	
=====	
Root Bridge Information	Configure Spanning Tree Parameters
-----	-----
Priority : 32768	Priority (0-65535) :32768
Mac Address : 000A17000001	
Root_Path_Cost: 0	Max Age (6-40) :20
Root Port : Root	Hello Time (1-10) :2
Max Age : 20	
Hello Time : 2	Forward_Delay_Time(4-30) :15
Forward Delay : 15	
actions-> <Edit> <Save> <Quit>	
Select the action menu.	
Tab=Next Item BackSpace=Previous Item Quit=Previous menu Enter=Select Item	

Actions->

1. You can view spanning tree information about the Root Bridge on the left.
2. On the right, user can set new value for STP parameter.

NOTE: All about the parameter description please see the [sections 2-4-8](#).

4-3-2. SNMP

Any Network Management running the simple Network Management Protocol (SNMP) can be management the switch.

Use this page to define management stations as trap managers and to enter SNMP community strings. User can also define a name, location, and contact person for the switch.

```
Intelligent Switch : SNMP Configuration
=====

System Options
Community Strings
Trap Managers
Previous Menu

Configure the system information.
Tab=Next Item      BackSpace=Previous Item      Enter=Select Item
```

4-3-2-1. System Options

```
Intelligent Switch : System Options Configuration
=====

System Name :
Intelligent 24+2 Switch

System Contact :
Root

System Location :
Local

actions->          <Edit>          <Save>          <Quit>
Select the action menu.
Tab=Next Item  BackSpace=Previous Item  CTRL+A=Action menu  Enter=Select Item
```

Actions->

1. Press <Edit>.
2. **System Name:** Type a name to be used for the switch.

-
3. **System Contact:** Type the name of contact person or organization.
 4. **System Location:** Type the location of the switch.
 5. Press **Ctrl+A** go back action menu line.
 6. Press **<Save>** to save the configure value.

4-3-2-2. Community Strings

Use this page to Add/ Edit/ Delete SNMP community strings.

1. **Community Name:** The name of current strings.
2. **Write Access:** Enable the rights is read only or read-write.

Restricted: Read only, enables requests accompanied by this string to display MIB-object information.

Unrestricted: Read write, enables requests accompanied by this string to display MIB-object information and to set MIB objects.

Intelligent Switch : SNMP Community Configuration	
=====	
Community Name	Write Access

public	Restricted
private	Unrestricted

actions-> <Add> <Edit> <Delete> <Quit>

Add/Edit/Delete community strings.

Tab=Next Item BackSpace=Previous Item CTRL+A=Action menu Enter=Select Item

● Add Community Name

1. Press <Add> --> <Edit> key.
2. **Community Name:** Type the community name.
3. **Write Access:** Press **Space** key to select the right is restricted or unrestricted.

```
Intelligent Switch : Add SNMP Community
=====

Community Name :Command1
Write Access    :Restricted

actions->          <Edit>          <Save>          <Quit>
Select the action menu.
Tab=Next Item  BackSpace=Previous Item  Space=Toggle  Ctrl+A=Action menu
```

● Edit Community Name

1. Press <Edit> key, choose the item that you want to modify and then press **Enter**.
2. **Community Name:** Type the new name.
3. **Write Access:** Press <Space> key to change the right is restricted or unrestricted.

```
Intelligent Switch : Edit SNMP Community
=====

Community Name :public
Write Access    :Restricted

actions->          <Edit>          <Save>          <Quit>
Select the action menu.
Tab=Next Item  BackSpace=Previous Item  Quit=Previous menu  Enter=Select Item
```


● Delete Community Name

1. Press <Delete> key.
2. Choose the community name that you want to delete and then press enter.
3. When pressing <Enter> once will complete deletion on delete mode.

```
Intelligent Switch : SNMP Community Configuration
=====

Community Name      Write Access
-----
public              Restricted
private             Unrestricted
Command1            Restricted

actions->           <Add>           <Edit>           <Delete>           <Quit>
Delete SNMP community strings.
Tab=Next Item  BackSpace=Previous Item  CTRL+A=Action menu  Enter=Select Item
```

4-3-2-3. Trap Managers

A trap manager is a management station that receives traps, the system alerts generated by the switch. If no trap manager is defined, no traps are issued. Create a trap manager by entering the IP address of the station and a community string.

```
Intelligent Switch : Trap Managers Configuration
=====

IP                      Community Name
-----

actions->      <Add>      <Edit>      <Delete>      <Quit>
Add/Edit/Delete trap managers.
Tab=Next Item  BackSpace=Previous Item  Quit=Previous menu  Enter=Select Item
```

- **Add SNMP trap manager**

1. Press <Add> --> <Edit> to add the trap manager.
2. **IP:** Type the IP address.
3. **Community Name:** Type the community name.
4. Press **Ctrl +A** go to actions line, press <Save> key to save all configure.

```
Intelligent Switch : Add SNMP Trap Manager
=====

IP :192.168.1.234
Community Name :public

actions->      <Edit>      <Save>      <Quit>
Select the action menu.
Tab=Next Item  BackSpace=Previous Item  CTRL+A=Action menu  Enter=Select Item
```


● Edit trap managers

1. Press <Edit> key, and then choose the item that you want to modify.
2. **IP:** Type the new IP address
3. **Community Name:** Type the community name.
4. Press **Ctrl +A** go to actions line, press <Save> key to save all configure.

```
Intelligent Switch : Edit Trap Managers
=====

IP :192.168.1.234

Community Name :public


actions->      <Edit>      <Save>      <Quit>
Select the action menu.
Tab=Next Item  BackSpace=Previous Item  Quit=Previous menu Enter=Select Item
```

● Delete trap manager

1. Press <Delete> key.
2. Choose the trap manager that you want to delete and then press enter.
3. When pressing <Enter> once will complete deletion on delete mode.

```
Intelligent Switch : Trap Managers Configuration
=====

IP      Community Name
-----
192.168.1.234      public


actions->      <Add>      <Edit>      <Delete>      <Quit>
Delete SNMP trap managers.
Tab=Next Item  BackSpace=Previous Item  Quit=Previous menu Enter=Select Item
```

4-3-3. GVRP

GVRP (GARP [Generic Attribute Registration Protocol] VLAN Registration Protocol)

GVRP allows automatic VLAN configuration between the switch and nodes.

For example, if the switch is connected to a device with GVRP enabled, you can enable this setting to allow dynamic VLAN configuration information to be processed by the switch.

If a device sends a GVRP request using the VID of a VLAN defined on the switch, the switch will automatically add that device to the existing VLAN.

This page you can enable / disable the GVRP (GARP VLAN Registration Protocol) support.

Intelligent Switch : GVRP Configuration
=====

GVRP : **Enabled**

actions-> <Edit> <Save> <Quit>

Select the action menu.

Tab=Next Item BackSpace=Previous Item Space=Toggle Ctrl+A=Action menu

Actions->

1. Select **<Edit>**.
2. Press **Space** key to choose Enabled / Disabled.
3. Press **Ctrl+A** back to action menu line.
4. Select **<Save>** to save configure value.

Note: GVRP must also be enabled on participating network nodes.

4-3-4. IGMP

The Internet Group Management Protocol (IGMP) is an internal protocol of the Internet Protocol (IP) suite.

This page you can enable / disable the IGMP support.

```
Intelligent Switch : IGMP Configuration
=====

IGMP : Enabled

actions->      <Edit>          <Save>          <Quit>
Select the action menu.
Tab=Next Item  BackSpace=Previous Item  Space=Toggle  Ctrl+A=Action menu
```

Actions->

1. Select **<Edit>**.
2. Press **Space** key to choose Enabled / Disabled.
3. Press **Ctrl+A** go back action menu line.
4. Select **<Save>** to save configure value.

4-3-5. LACP (Link Aggregation Control Protocol)

This page can configure and view all the LACP status.

```
Intelligent Switch : LACP Configuration
=====

Working Ports Setting

State Activity
LACP Status
Previous Menu

LACP setting.
Tab=Next Item      BackSpace=Previous Item      Enter=Select Item
```

Note: All ports support LACP dynamic trunking group. If connecting to the device that also supports LACP, the LACP dynamic trunking group will be created automatically.

4-3-5-1. Working Port Setting

This page can set the actually work ports in trunk group.

```
Intelligent Switch : LACP Group Configuration
=====

Group      LACP Work Port Num
-----
TRK2      4

<Edit>      <Save>      <Quit>
Select the action menu.
m BackSpace=Previous Item  Space=Toggle  Ctrl+A=Action menu
```

Actions->

1. Select **<Edit>**.
2. **Group:** Display the trunk group ID.
3. **LACP:** Display the trunk group's LACP status.
4. **LACP Work Port Num:** The max number of ports can be aggregated at the same time. If LACP static trunking group, the exceed ports is standby and able to aggregate if work ports fail. If local static trunking group, the number must be the same as group ports.

4-3-5-2. State Activity

Actions->

NOTE: If user set LACP mode in the trunk group, all of the member ports of this trunk group will set "Active" automatic.

4-3-5-3. LACP Status

When you're setting trunking group, you can see the relational information here.

Static trunk group

```
Intelligent Switch : LACP Group Status
=====

Static Trunking Group

Group Key : 1
Port_No   : 1 2 3 4

<Quit>      <Previous Page>    <Next Page>
Select the action menu.
n BackSpace=Previous Item Quit=Previous menu Enter=Select Item_
```

LACP trunk group

```
Intelligent Switch : LACP Group Status
=====

Priority: 1
MAC      : 004063809988

Port_No  Key  Priority  Active  Port_No  Key  Priority
5        514    1        selected  5        514    1
6        514    1        selected  6        514    1
7        514    1        selected  7        514    1
8        514    1        selected  8        514    1

actions->    <Quit>      <Previous Page>    <Next Page>
Select the action menu.
ab=Next Item BackSpace=Previous Item Quit=Previous menu Enter=Select Item
```

Actions->

<Quit>: Exit this page and return to previous menu.

<Previous Page>: Return to previous page to view.

<Next page>: Go to the next page to view.

4-3-6. 802.1x Protocol

This page can configure and view all the 802.1x status.

```
Intelligent Switch : 802.1x protocol
=====

802.1x Enable

System Configuration
Misc Configuration
Previous Menu

Enabled or disabled the 802.1x Protocol.
Tab=Next Item      BackSpace=Previous Item      Enter=Select Item
```

4-3-6-1. 802.1x Enable

```
Intelligent Switch : 802.1x Enabled/Disabled Configuration
=====

802.1x : Enabled

actions->      <Edit>      <Save>      <Quit>
Select the action menu.
Tab=Next Item  BackSpace=Previous Item  Quit=Previous menu  Enter=Select Item
```

1. Select **<Edit>**.
2. Press **Space** key to choose Enabled / Disabled.
3. Press **Ctrl+A** go back action menu line.
4. Select **<Save>** to save configure value.

4-3-6-2. 802.1x System Configuration

```
Intelligent Switch : 802.1x System Configuration
=====

Radius Server IP : 192.168.221.72

Shared Key : 12345678

NAS,Identifier: NAS_L2_SWITCH

Server Port: 1812

Accounting Port: 1813

(Force Unauth=Fu, Force Auth=Fa, Auto=Au, None=No):
01 02 03 04 05 06 07 08 09 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 M1 M2
No No Au Au Au No No No No No No No No No No No No No No No No No No No

actions->      <Edit>      <Save>      <Quit>
Select the action menu.
Tab=Next Item  BackSpace=Previous Item  Quit=Previous menu  Enter=Select Item
```

1. Press <Edit>.
2. **Radius Server IP Address:** the IP address of the authentication server.
3. **Shared Key:** A key shared between this switch and authentication server.
4. **NAS, Identifier:** A string used to identify this switch.
5. **Server Port:** The UDP port number used by the authentication server to authenticate.
6. **Accounting Port:** The UDP port number used by the authentication server to retrieve accounting information.
7. Press **Ctrl+A** go back action menu line.
8. Press <Save> to save configure value.

Note:

Fu : Force the specific port to be unauthorized.

Fa : Force the specific port to be authorized.

Au : The state of the specific port was determined by the outcome of the authentication.

No : The specific port didn't support 802.1x function.

4-3-6-3. 802.1x Misc Configuration

```
Intelligent Switch : 802.1x Misc Configuration
=====

Quiet-period <0..65535,default=60>      : 60
Tx-period <0..65535,default=30>          : 30
Supplicant-timeout <1..300,default=30>    : 30
Server-timeout <1..300,default=30>        : 30
ReAuthMax <1..10,default=2>               : 2
Reauth-period <1..999999,default=3600>   : 3600

actions->      <Edit>      <Save>      <Quit>
Select the action menu.
Tab=Next Item BackSpace=Previous Item Quit=Previous menu Enter=Select Item
```

1. Press **<Edit>**.
2. **Quiet Period** : Used to define periods of time during which it will not attempt to acquire a supplicant(Default time is 60 seconds).
3. **Tx Period** : Used to determine when an EAPOL PDU is to be transmitted (Default value is 30 seconds).
4. **Supplicant Timeout** : Used to determine timeout conditions in the exchanges between the supplicant and authentication server(Default value is 30 seconds).
5. **Server Timeout** : Used to determine timeout conditions in the exchanges between the authenticator and authentication server(Default value is 30 seconds).
6. **ReAuthMax** : Used to determine the number of reauthentication attempts that are permitted before the specific port becomes unauthorized(Default value is 2 times).
7. **Reauth Period** : used to determine a nonzero number of seconds between periodic reauthentication of the supplications(Default value is 3600 seconds).
8. Press **Ctrl+A** go back action menu line.
9. Press **<Save>** to save configure value.

4-4. Status and Counters

```
Intelligent Switch : Status and Counters
=====

Port Status
Port Counters
System Information
Main Menu

Display current status of all the switch ports.
Tab=Next Item      BackSpace=Previous Item      Enter=Select Item
```

You can press the key of **Tab** or **Backspace** to choose item, and press **Enter** key to select item.

4-4-1. Port Status

This page display every port status

```
Intelligent Switch : Port Status
=====
```

Port	Link Status	InRate (100K)	OutRate (100K)	Enable	Auto	Spd/Dpx	Flow Control
PORT1	Down	0	0	Yes	AUTO	10 Half	Off
PORT2	Down	0	0	Yes	AUTO	10 Half	Off
PORT3	Down	0	0	Yes	AUTO	10 Half	Off
PORT4	Down	0	0	Yes	AUTO	10 Half	Off
PORT5	Down	0	0	Yes	AUTO	10 Half	Off
PORT6	Down	0	0	Yes	AUTO	10 Half	Off
PORT7	Down	0	0	Yes	AUTO	10 Half	Off
PORT8	Down	0	0	Yes	AUTO	10 Half	Off

```
actions->      <Quit>      <Previous Page>      <Next Page>
Select the action menu.
Tab=Next Item  BackSpace=Previous Item  Quit=Previous menu  Enter=Select Item
```

Link Status: Display the port is link or no link.

InRate: Display the input rate control (100K/unit) setting value.

OutRate: Display the output rate control (100K/unit) setting value.

Enabled: Display the port is enabled or disable depended on user setting. Enable will be display “Yes”, disable will be display “No”. If the port is unlink will be treated as “No”.

Auto: Display the port is link on which Nway mode: Auto , Nway_Force , Force.

Spd/Dpx: Display the port speed and duplex.

FlowCtrl: In auto / Nway force mode, display the flow control status is enable or not after negotiation. In force mode, display the flow control status is enable or disable depending on user setting.

Actions->

<Quit>: Exit the page of port status, and return to previous menu.

<Previous Page>: Display previous page.

<Next page>: Display next page.

4-4-2. Port Counters

The following information provides a view of the current status of the unit.

Intelligent Switch : Port Counters							
=====							
Port	TxGoodPkt	TxBadPkt	RxGoodPkt	RxBadPkt	TxAbort	Collision	DropPkt
PORT1	0	0	0	0	0	0	0
PORT2	0	0	0	0	0	0	0
PORT3	0	0	0	0	0	0	0
PORT4	0	0	0	0	0	0	0
PORT5	0	0	0	0	0	0	0
PORT6	0	0	0	0	0	0	0
PORT7	0	0	0	0	0	0	0
PORT8	0	0	0	0	0	0	0
actions-> <Quit> <Reset All> <Previous Page> <Next Page>							
Configure the action menu.							
Tab=Next Item BackSpace=Previous Item Quit=Previous menu Enter=Select Item							

Actions->

<Quit>: Exit the page of port status, and return to previous menu.

<Reset All>: Set all count to 0.

<Previous Page>: Display previous page.

<Next page>: Display next page.

4-4-3. System Information

MAC Address: The unique hardware address assigned by manufacturer.

Firmware Version: Display the switch's firmware version.

ASIC Version: Display the switch's Hardware version.

PCBA version: Display the board number.

Serial number: Display the serial number assigned by manufacturer.

Module 1 Type: Display the module 1 type :1000Tx or 100Fx ext. Depend on module card mode.

Module 1 information: Display the information saved in eeprom of module1.

Module 2 Type: Display the module 2 type :1000Tx or 100Fx ext. Depend on module card mode.

Module 2 information: Display the information saved in eeprom of module2.

Intelligent Switch : System Information	
=====	
MAC Address	: 004063809988
Firmware version	: 2.5
ASIC version	: A7.0
PCBA version	: 1.0
Serial number	:
Module 1 Type	: 1000Tx
Module 1 information	: N/A
Module 2 Type	: 1000Tx
Module 2 information	: N/A
Display the switch system.	
Esc=Previous menu	

4-5. Reboot Switch

```
Intelligent Switch : Restart Configuration
=====

Default
Restart
Previous Menu

Recovering to default.
Tab=Next Item      BackSpace=Previous Item      Enter=Select Item
```

4-5-1. Default

Reset switch to default configuration, default value please *section 2-4-14*.

```
Resetting to the default will restart the system automatically!
Do you want to continue? (y/n)
```

4-5-2. Restart

Reboot the switch in software reset.

4-6. TFTP Update Firmware

This page provide user to update firmware or restore EEPROM value or upload current EEPROM value.

```
Intelligent Switch : TFTP Update firmware Configuration
=====

TFTP Update Firmware

TFTP Restore configuration

TFTP Backup configuration

Previous Menu

Use TFTP to update firmware.
Tab=Next Item      BackSpace=Previous Item      Enter=Select Item
```

4-6-1. TFTP Update Firmware

This page provides user use TFTP to update firmware.

```
Intelligent Switch : TFTP Update Firmware
=====

TFTP Server      : 192.168.223.99

Remote File Name : image.bin

actions->      <Edit>      <Save>      <Quit>
Select the action menu.
Tab=Next Item  BackSpace=Previous Item  Quit=Previous menu  Enter=Select Item
```

Actions->

1. Start the TFTP server, and copy firmware update version image file to TFTP server.
2. Press <Edit> on this page.
3. **TFTP Server:** Type the IP of TFTP server.
4. **Remote File Name:** Type the image file name.
5. Press **Ctrl+A** go to action line.
6. Press <Save> key, it will start to download the image file.
7. When save successfully, the image file download finished too.
8. Restart switch.

4-6-2. Restore Configure File

This page user can restore EEPROM value, save image file before, form TFTP server.

```
Intelligent Switch : Restore Configuration File
=====

TFTP Server      : 192.168.223.99
Remote File Name : data.dat

actions->      <Edit>      <Save>      <Quit>
Select the action menu.
Tab=Next Item  BackSpace=Previous Item  Quit=Previous menu  Enter=Select Item
```

Actions->

1. Start the TFTP server.
2. Press <Edit> on this page.
3. **TFTP Server:** Type the IP of TFTP server.
4. **Remote File Name:** Type the image file name.
5. Press **Ctrl+A** go to action line.
6. Press <Save> key, it will start to download the image file.
7. When save successfully, the image file download finished too.
8. Restart switch.

4-6-3. Backup Configure File

This page user can save current EEPROM value to image file. Then go to the update configure page to restore the EEPROM value.

```
Intelligent Switch : Backup Configuration File
=====

TFTP Server       : 192.168.223.99
Remote File Name  : data.dat

actions->          <Edit>          <Save>          <Quit>
Select the action menu.
Tab=Next Item  BackSpace=Previous Item  Quit=Previous menu  Enter=Select Item
```

Actions->

1. Start the TFTP server.
2. Press <Edit> on this page.
3. **TFTP Server:** Type the IP of TFTP server.
4. **Remote File Name:** Type the image file name.
5. Press **Ctrl+A** go to action line.
6. Press <Save> key, it will start to upload the image file.
7. When save successfully, the image file upload finished too.
8. Restart switch.


5.0 Application Examples

5.1 VLAN application used with switch

VLAN is a simple solution to protect your network against broadcast storming by creating segments based on Layer2 Ethernet information and avoiding the complexity and the heavy processing requirements of Layer3 IP based routers.

As a result, each group of stations connected to separate Segmented Ports forms different isolated Broadcast Domain. The Broadcast Sharing Ports should be used to connect servers and other common services, such as Internet access, that are used by all the stations connected to the different Segmented Ports.


Virtual LAN, or VLAN, is generally defined as broadcast domain. It can be viewed as a group of end nodes, possibly on different physical network segments, which can communicate with each other.

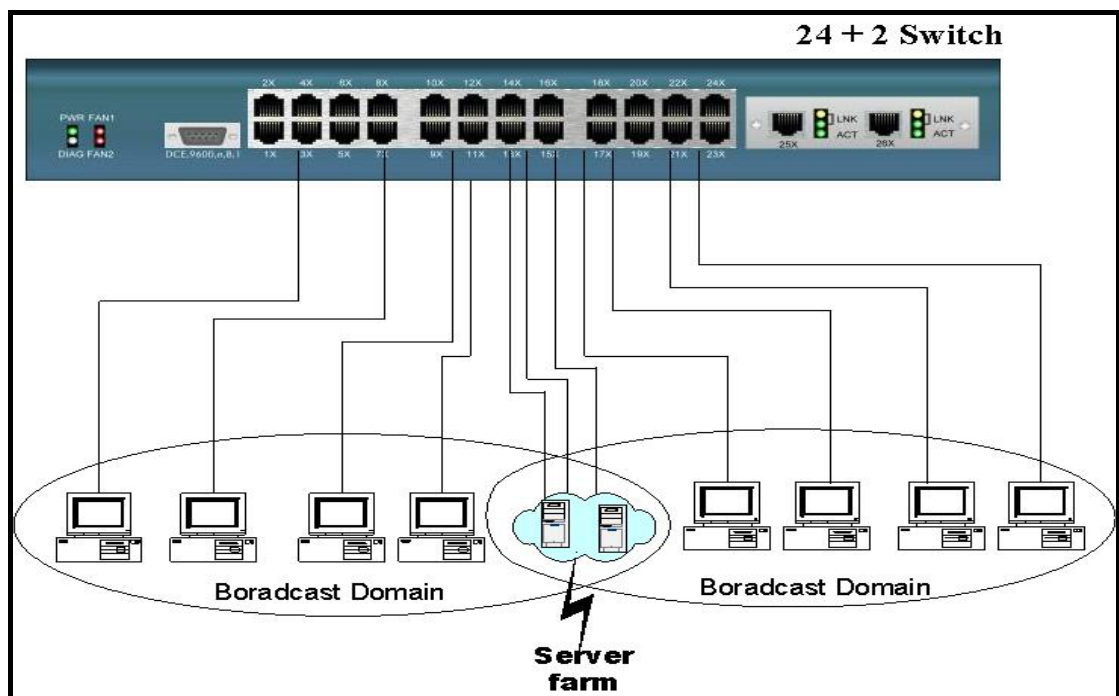

Benefits of VLANs

- Grouping users into logical networks for performance enhancement.
- Provides effective broadcasts containment between Segmented Ports, which prevents flooding of a network.
- Offers security by completely isolating from each other the different Broadcast Domains connected on separate Segmented Ports.
- Preserving current investment in equipment and cabling.
- Providing an easy, flexible, economic way to modify logical groups when needed.
- Network administrators can easily "fine tune" the network.
- Keeping network structure from the physical topology of the cabling.
- Making large networks more manageable.

You can group users according to some shared characteristic, such as a common business function or a common protocol. A single switch may have several independent VLANs within it. Below is a example that R&D, Manufacturing and Administration group can be partitioned into two different VLAN group, even members in different group can't talk directly, but they still share the same server, such as MRP server, printer server in Administration group...etc.

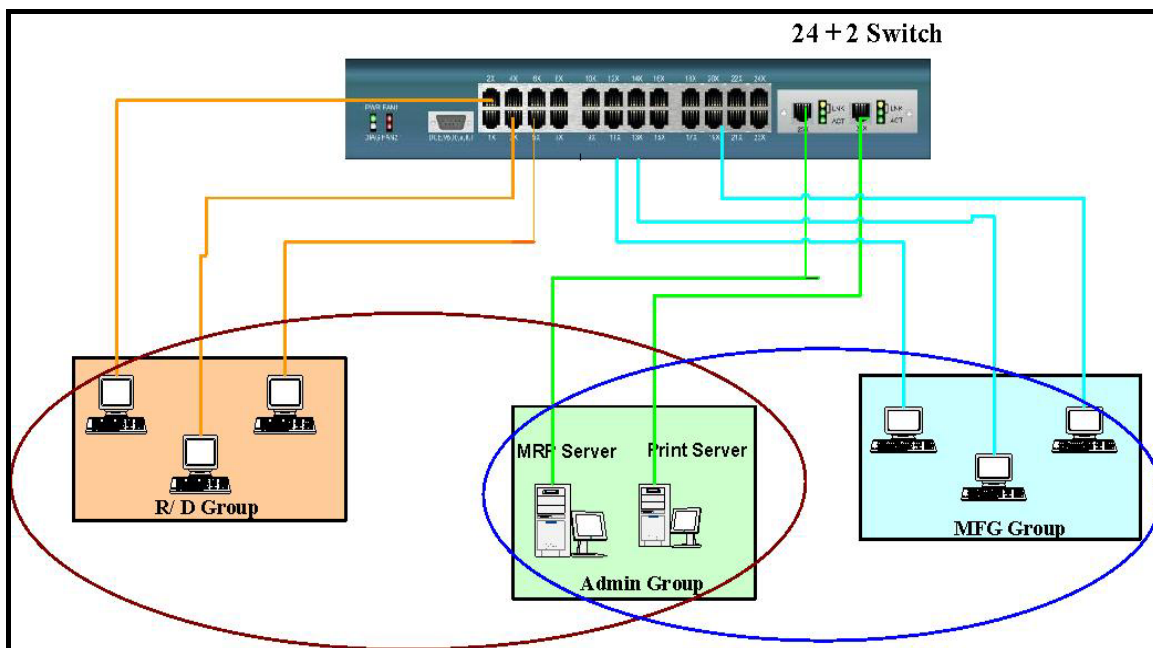

5.2 Trunking Application used with switch

Trunking allows you to increase the available bandwidth between switches by grouping ports into a trunk. Trunk can also be used to connect server to switches for higher bandwidth service required. You can use trunking to improve the throughput between segments. Moreover, this switch furtherly provides trunk with fail-over function, that is, when one of the links of trunk is fail or broken, the traffic originally go through that link will be automatically re-direct to other links of trunk, this give the trunk with redundancy and greatly increase the value of trunking.

